



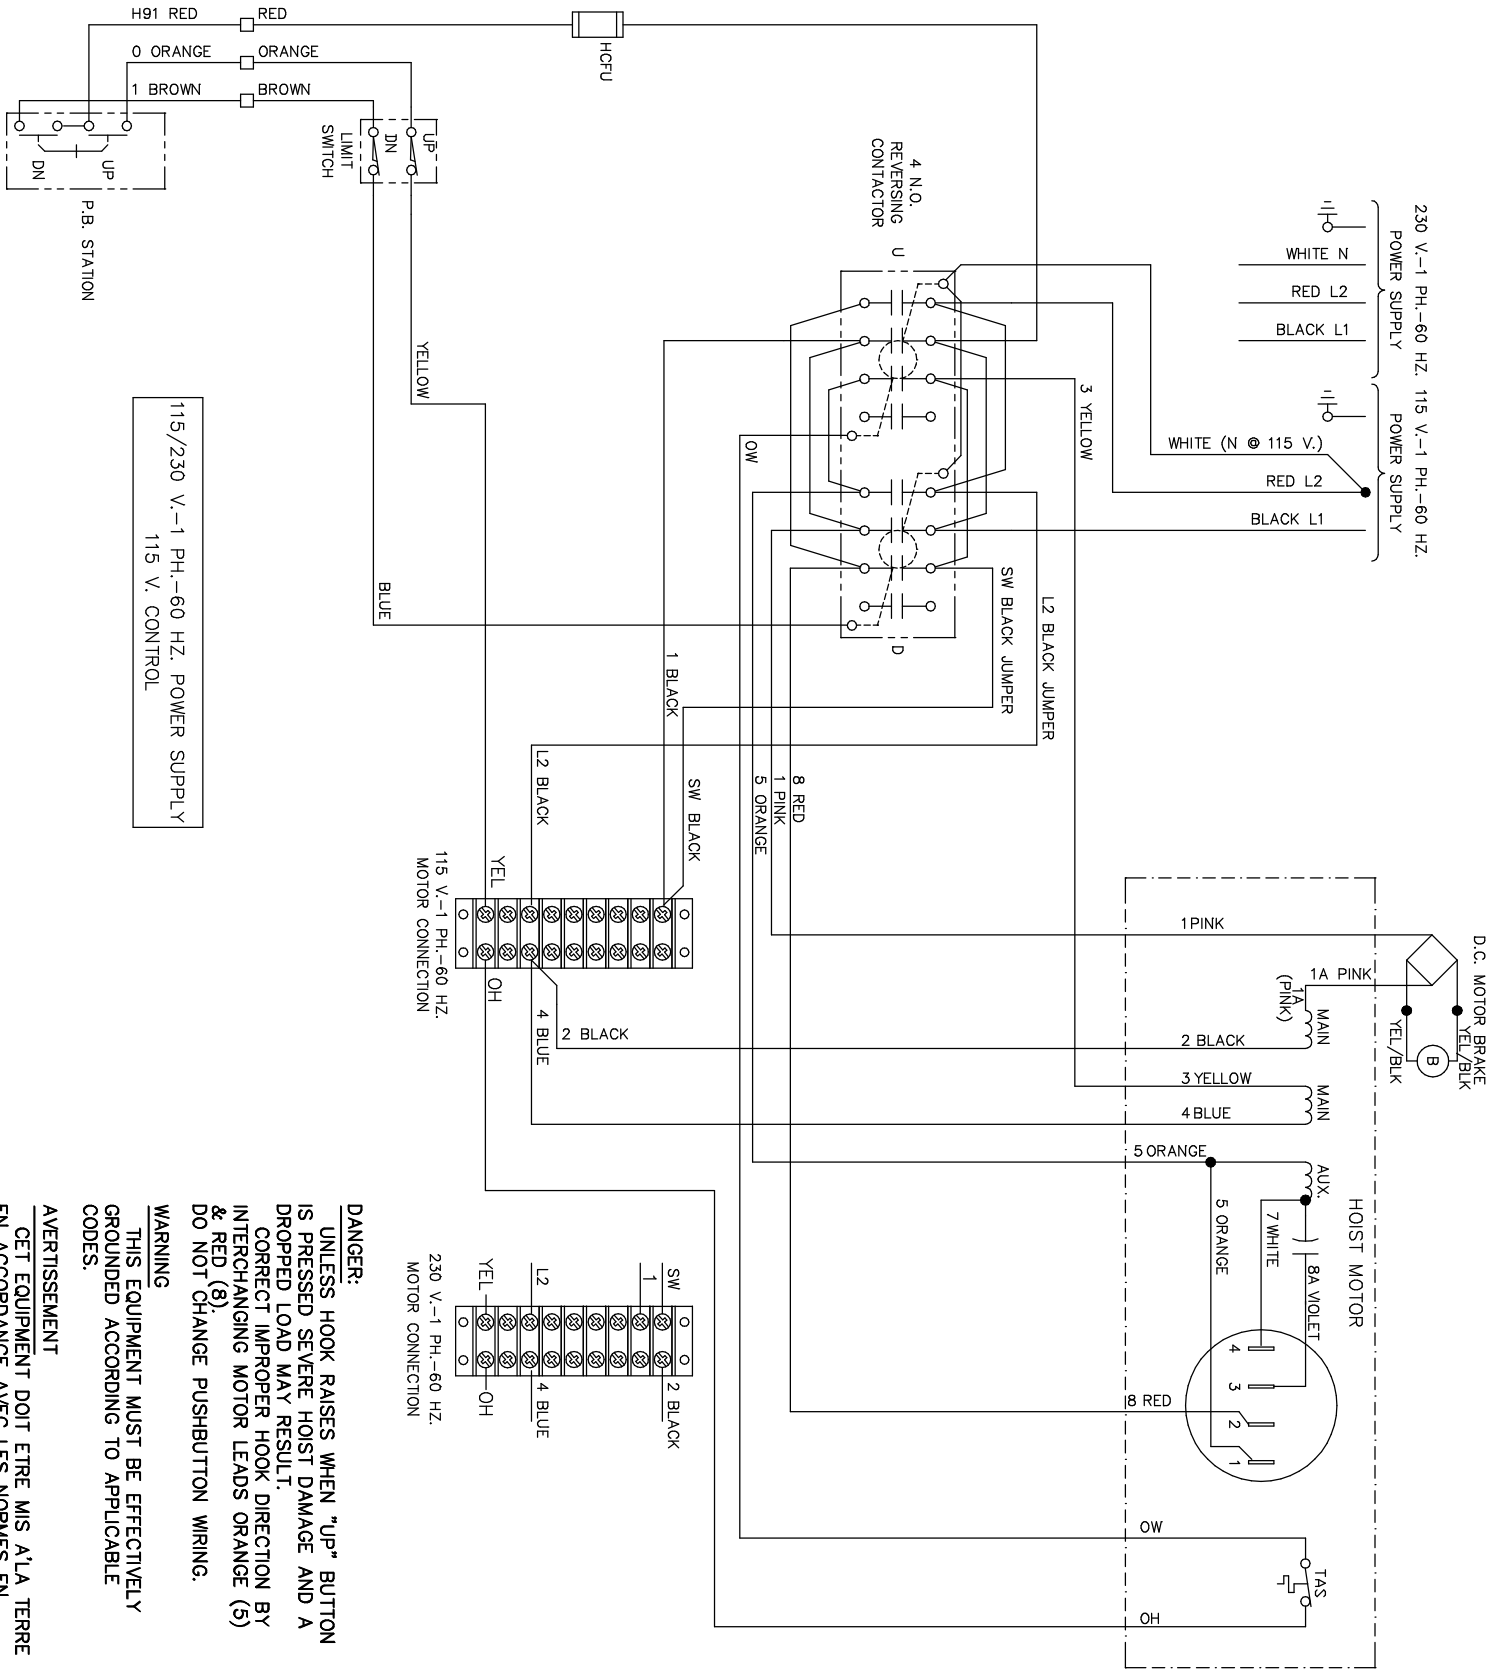

115/230 V.-1 PH.-60 HZ. POWER SUPPLY
115 V. CONTROL

230 V.-1 PH.-60 HZ.
MOTOR CONNECTION



DANGER:

UNLESS HOOK RAISES WHEN "UP" BUTTON IS PRESSED SEVERE HOIST DAMAGE AND A DROPPED LOAD MAY RESULT. CORRECT IMPROPER HOOK DIRECTION BY INTERCHANGING MOTOR LEADS ORANGE (5) & RED (8). DO NOT CHANGE PUSHBUTTON WIRING.

WARNING

THIS EQUIPMENT MUST BE EFFECTIVELY GROUNDED ACCORDING TO APPLICABLE CODES.

AVERTISSEMENT

CET EQUIPEMENT DOIT ETRE MIS A LA TERRE EN ACCORDANCE AVEC LES NORMES EN VIGUEUR.

NO.	CHANGE	DATE	ITL.	WIRING DIAGRAM
1	YEL. & OH WERE ON U-AUX	2/90	BES	1 PHASE RECONNECTABLE, STEARNS REVERSING SWITCH
				D.C. SOLENOID BRAKE
				BUDGIT ELECTRIC HOIST
				SC. -----
				DA. 6/28/89
				DR. VERBOS
				CK.
				YALE • LIFT-TECH division of Columbus McKinnon Corporation Muskegon, Michigan 49443
				SHEET 1 OF MORE SHEETS
				330174