


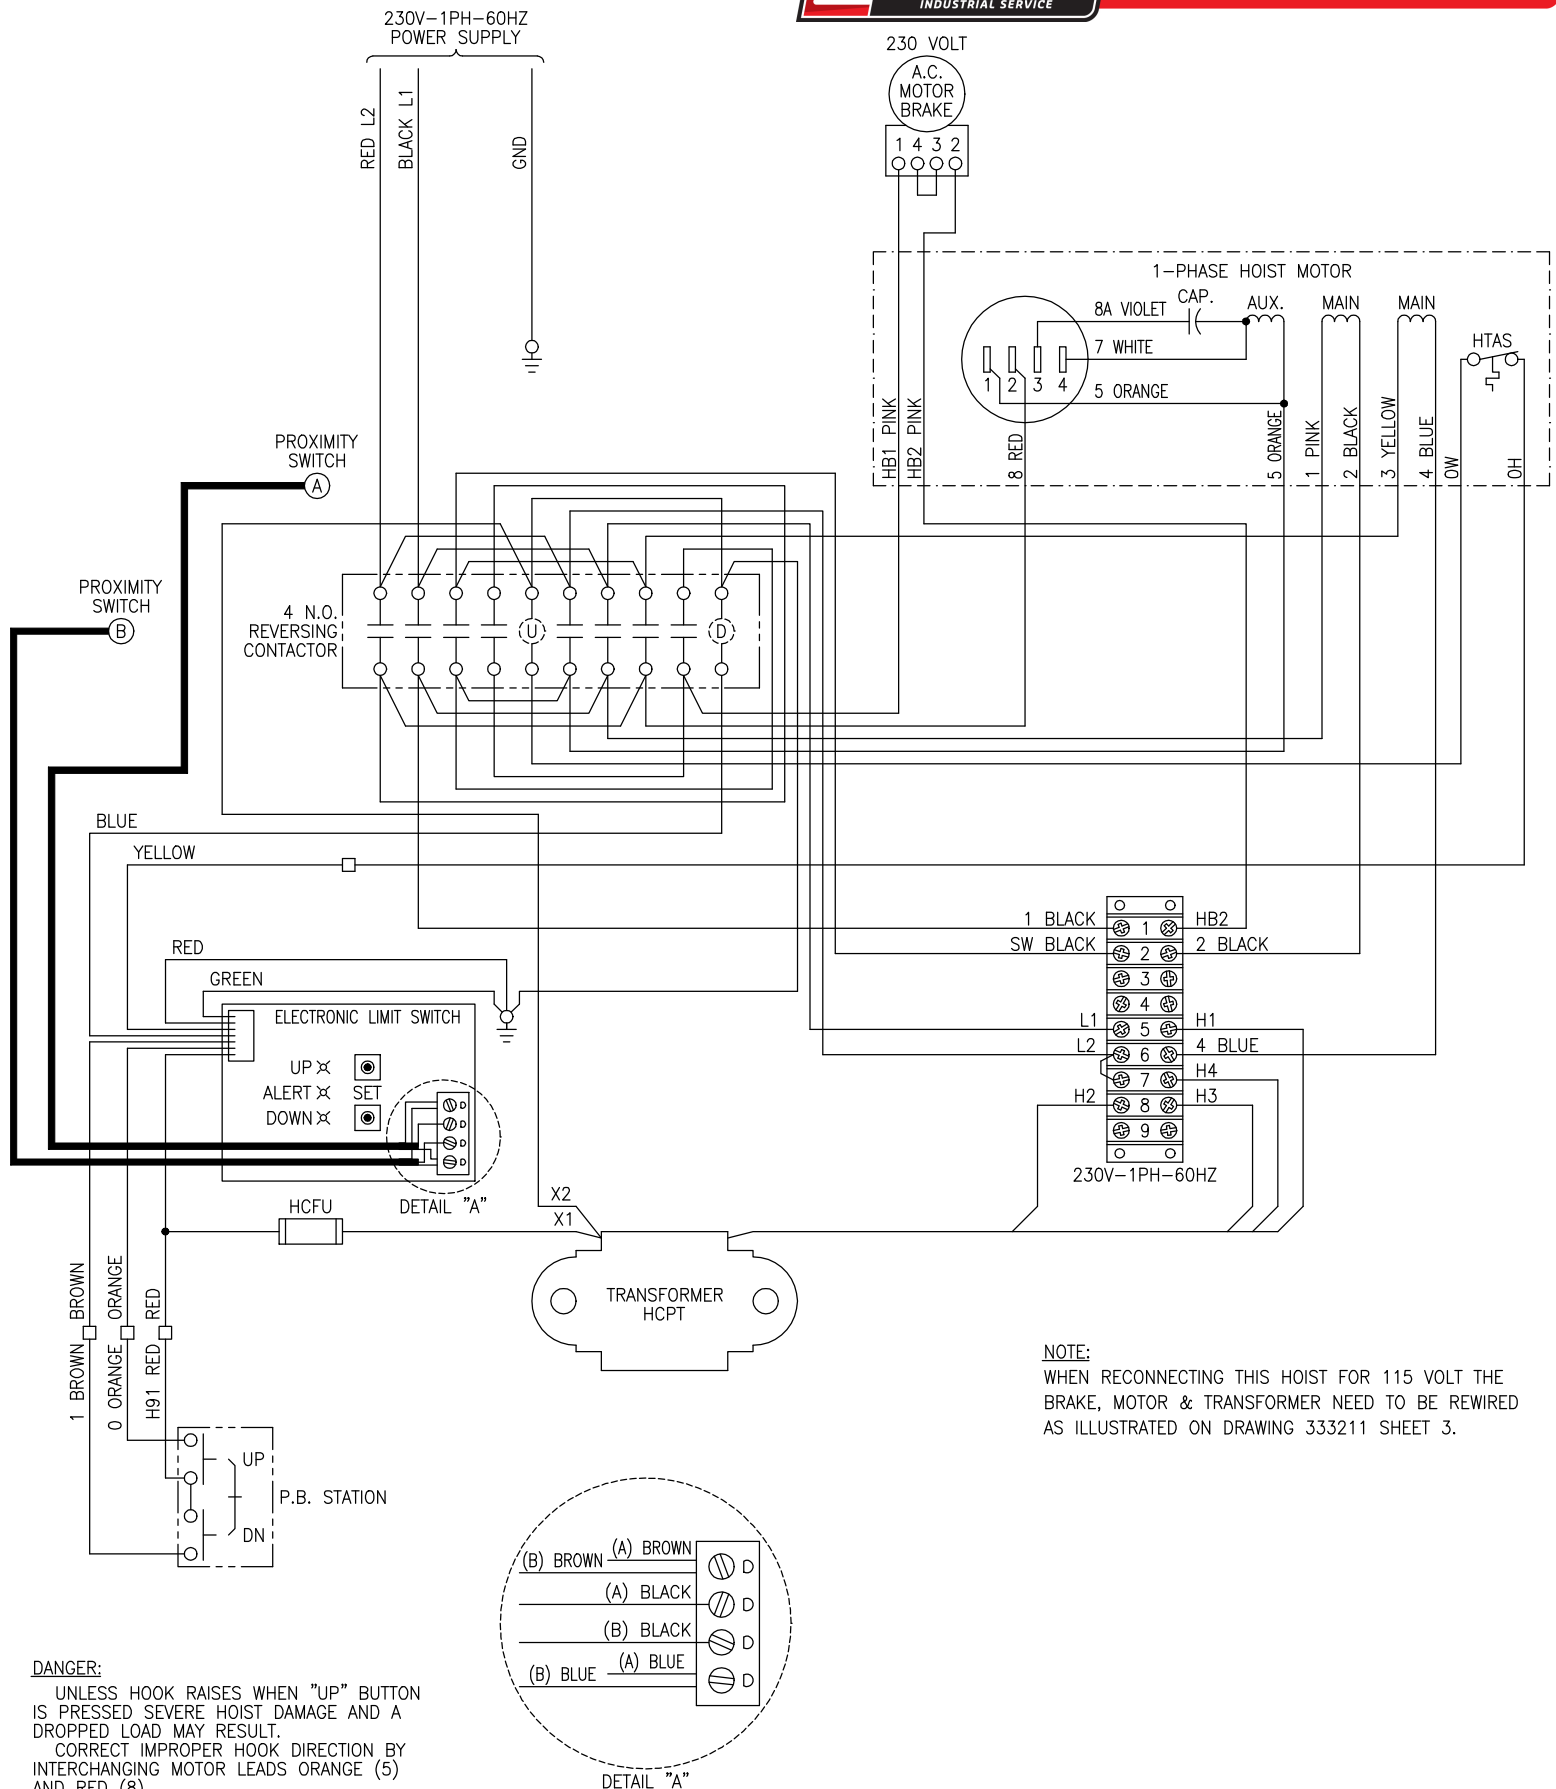

DANGER:

UNLESS HOOK RAISES WHEN "UP" BUTTON IS PRESSED SEVERE HOIST DAMAGE AND A DROPPED LOAD MAY RESULT.

CORRECT IMPROPER HOOK DIRECTION BY
INTERCHANGING MOTOR LEADS ORANGE (5)
AND RED (8).

DO NOT CHANGE PUSHBUTTON WIRING.

WARNING

THIS EQUIPMENT MUST BE EFFECTIVELY GROUNDING ACCORDING TO APPLICABLE CODES.

AVERTISSEMENT

CET EQUIPMENT DOIT ETRE MIS A'LA TERRE
EN ACCORDANCE AVEC LES NORMES EN
VIGUEUR.

FROM 333171 SHEET 3

NOTE:

WHEN RECONNECTING THIS HOIST FOR 115 VOLT THE
BRAKE, MOTOR & TRANSFORMER NEED TO BE REWIRED
AS ILLUSTRATED ON DRAWING 333211 SHEET 3.

NO.	CHANGE	DATE	ITL.	WIRING DIAGRAM	230 VOLT
				1 PHASE RECONNECTABLE WITH TRANSFORMER	
				A.C. SOLENOID BRAKE, STEARNS REVERSING SWITCH	
				BUDGIT ELECTRIC HOIST	
				SC. -----	 YALE • LIFT-TECH division of Columbus McKinnon Corporation Muskegon, Michigan 49443
				DA. 8/29/06	
				DR. RITTER	
				CK.	
					SHEET 4 OF 4 SHEETS
					333211