



MILLINGTON, TN

LITTLE ROCK, AR

Job Information

Job #: 94225

Date: July 24, 2018

Priority: —

Authorized OT: No

Authorized by:

Customer Information

Name: Delta Plastics

Motor#:

Name Plate Information

Manufacturer:	Bald or/Reliance	Enclosure :	Open Drop Proof (ODP)	Horsepower/kW:	150
Serial#:	B9126122-020002	Model#:	8889014	Service Factor:	
Frame:	URL288	Rated RPM:	1750	Rated Voltage:	460
Phase:	3	Rated Amps:	180	Cycles:	60

Special design: No

AC Electrical Inspection

Megs after rewind:	Good	Surge after rewind:	Good	Hi-pot after rewind:	Good
--------------------	------	---------------------	------	----------------------	------

Core loss:	Good	Thermistors:	None	Thermostat:	None
------------	------	--------------	------	-------------	------

RTD:	None	ohms at	degrees C
------	------	---------	-----------

Motor Heater(s) Present:	Yes	Qty:	Voltage:	Wattage:
--------------------------	-----	------	----------	----------

WEST TENNESSEE
7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301

CENTRAL ARKANSAS
6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254



MILLINGTON, TN

LITTLE ROCK, AR

AC Electrical Inspection (Continued)


Core Test Data

	Flux	Watts	Watts loss per lb	Condition of iron
Before burnout				
After burnout				

Conclusion

Service Tech name: RHR

Service Tech signature:

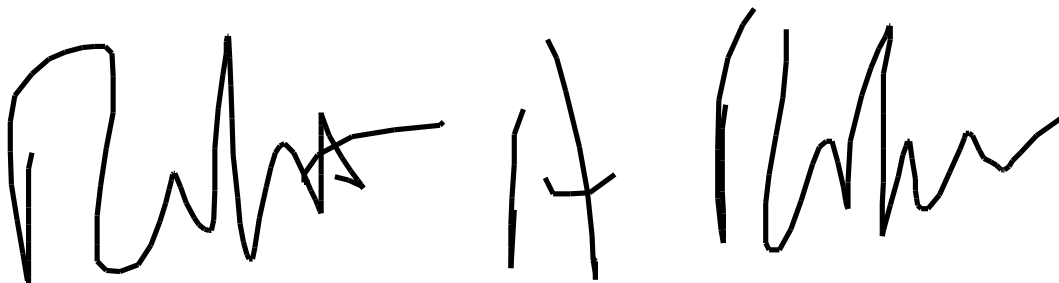

WEST TENNESSEE

7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301

CENTRAL ARKANSAS

6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254

Polyphase AC Winding

Polyphase Date: July 24, 2018

Hp/kw: 150 RPM: 1750 Poles: Manufacturer: Bald or/Reliance

Slots: 48 Type: Volts: 460

Coils: 48 Model: 8889014 Amps: 180

12 Of 4

Grouping

Of

Serial#: B9126122-020002

Phase: 3

Lead marking: 1-1-2-2-3-3 Hertz: 60

Turns/Coil: 11 Lead length: 1 C Rise: Frame: URL288

Wire Size 17 Lead size: 4 Duty: C AMB:

Wire Mult. 5 Num.Leads: 6 Eff.: Ins.Cls.:

Pitch 1 to: 11 ☐ DP ☐ TEFC ☐ XPRF ☐ TENV S.F.:

Connection: 4Y

Jumper:

Core length: 10.375

Core ID: 8.5

Back iron: 1.25


Slot depth: 1.125

Slot/tooth w: 0.277

Wire weight: 54

Vents: Size

COIL

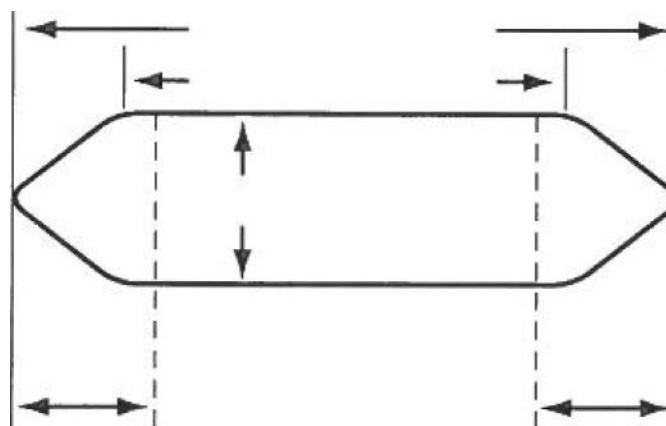
☒ Left

Connection End
(Facing Terminal Box)

☐ Right

Rotor bars:



MILLINGTON, TN

LITTLE ROCK, AR

Single Phase{ Split Phase ☐{ Capacitor: ☐ Start ☐ Start & Run ☐ Perm. Split

Hp/kw: 150

RPM: 1750

Manufacturer: Bald or/Reliance

Run

Start

Type:

Volts: 460

Model: 8889014

Amps: 180

No. Slots

Style:

Hertz:

No. Poles

Form:

Frame:

Coils/pole

Dwg No.

C Rise:

Hrs.:

Cap. Mfd.:

Wire Size

Serial#: B9126122-020002

Wires in par.

Duty: —

☐ BB☐ SB

No. Circuits

Open: —

Coil Ext.

Sta.length:

Sta.b.i.:

Stator Bore

Running ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Slot No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Starting ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Customer: Delta Plastics

(Please return a copy to EASA Headquarters, 1331 Baur Blvd., St. Louis, MO 63132)

WEST TENNESSEE7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301**CENTRAL ARKANSAS**6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254

AC Stator Form Coil Data

1. Core bore diameter
2. Total core length
3. Back iron
4. No. of vents
5. Width of vents
6. Finger plate width
7. Overall coil length
8. Connection end extension
9. Opposite Conn. End Ext.
10. Straight length bottom side
11. Straight length top side
12. Small knuckle drop. CE
13. Large knuckle drop. CE
14. Conn. Support Ring from core
15. Opp. Conn. Supp. Ring from core
16. Connection support ring ID
17. Opp. Conn. Supp. Ring ID
18. Total slot depth
19. Slot depth under wedge
20. Slot width

OCE

OCE



AC Stator Form Coil Data (Continued)

21. Lead location ☐ A ☐ B ☐ C ☐ D

22. Coil type ☐ Left hand ☐ Right hand

23. Coil leads Long# LG

Short# LG

☐ Out ☐ Down

24. Jumper —

25. Connection —

26. No. of circuits

27. No. of slots

28. Coil throw 1-

29. Turns per coil

30. Total wires in parallel

31. Bare wire sizes () x

() x

32. Strand insulation

☐ Film ☐ Glass ☐ Mica ☐ Bare ☐ Other

33. Coil weight Lbs.

34. Groups of Coils

Groups of Coils

35. Iron skewed ☐ Right ☐ Left in


AC Stator Form Coil Data (Continued)

Special Features	Yes	No
------------------	-----	----

Data change	<input type="checkbox"/>	<input type="checkbox"/>
-------------	--------------------------	--------------------------

Coil support ring steel	<input type="checkbox"/>	<input type="checkbox"/>
-------------------------	--------------------------	--------------------------

Terrace wound	<input type="checkbox"/>	<input type="checkbox"/>
---------------	--------------------------	--------------------------

Corona Protection	<input type="checkbox"/>	<input type="checkbox"/>
-------------------	--------------------------	--------------------------

RTDs	<input type="checkbox"/>	<input type="checkbox"/>
------	--------------------------	--------------------------

Ohms Qty		
----------	--	--

Hermetic	<input type="checkbox"/>	<input type="checkbox"/>
----------	--------------------------	--------------------------

Slot paper used	<input type="checkbox"/>	<input type="checkbox"/>
-----------------	--------------------------	--------------------------

Insulation class	<input type="checkbox"/> B	<input type="checkbox"/> F	<input type="checkbox"/> H
------------------	----------------------------	----------------------------	----------------------------

<input type="checkbox"/> VPI	<input type="checkbox"/> Dip & Bake	<input type="checkbox"/> Sealed
------------------------------	-------------------------------------	---------------------------------

<input type="checkbox"/> Leads taped	<input type="checkbox"/> Leads sleeved
--------------------------------------	--

Comments

