



MILLINGTON, TN

LITTLE ROCK, AR

## Job Information

Job #: 94690

Date: September 5, 2018

Priority: —

Authorized OT: No

Authorized by:

## Customer Information

Name: Ark Dust Control

Motor#:

## Name Plate Information

Manufacturer: Elmo

Enclosure : Open Drop Proof (ODP)

Horsepower/kW: .45KW

Serial#:

Model#:

Service Factor:

Frame:

Rated RPM: 3600/400

Rated Voltage: 208/240

Phase: 3

Rated Amps: 3/6

Cycles: 60

Special design: No

## AC Electrical Inspection

Megs after rewind: Good

Surge after rewind: Good

Hi-pot after rewind: Good

Core loss: Good

Thermistors: None

Thermostat: None

RTD: None

ohms at

degrees C

Motor Heater(s) Present: Yes

Qty:

Voltage:

Wattage:

**WEST TENNESSEE**  
7030 Ryburn Drive  
Millington, TN 38053  
Phone 901-873-5300  
Fax 901-873-5301

**CENTRAL ARKANSAS**  
6812 Lindsey Rd.  
Little Rock, AR 72206  
Phone 501-375-9178  
Fax 501-375-4254



MILLINGTON, TN

LITTLE ROCK, AR

## AC Electrical Inspection (Continued)

### Core Test Data

	Flux	Watts	Watts loss per lb	Condition of iron
Before burnout				
After burnout				

## Conclusion

Service Tech name: RHR

Service Tech signature:

#### WEST TENNESSEE

7030 Ryburn Drive  
Millington, TN 38053  
Phone 901-873-5300  
Fax 901-873-5301

#### CENTRAL ARKANSAS

6812 Lindsey Rd.  
Little Rock, AR 72206  
Phone 501-375-9178  
Fax 501-375-4254



MILLINGTON, TN

LITTLE ROCK, AR

## Polyphase AC Winding

Polyphase Date: September 5, 2018

Hp/kw: .45KW

RPM: 3600/400

Poles:

218 Manufacturer: Elmo

Slots: 54

Type:

Volts: 208/240

Coils: 27

Model:

Amps: 3/6

27 Of 1

Serial#:

Phase: 3

Grouping

Of

Lead marking:

1-2-3-11-12-13 Hertz:

60

Turns/Coil: 34

Lead length: 2

C Rise:

Frame:

Wire Size 18

Lead size: 16

Duty:

C AMB:

Wire Mult. 3

Num.Leads:

Eff.:

Ins.Cls.:

Pitch 1 to: 4

☐ DP☐ TEFC☐ XPRF☐ TENV

S.F.:

Connection: 1Y

Jumper:

Core length: 6.125

Core ID: 5.125

Back iron: 0.625

Slot depth: 0.875

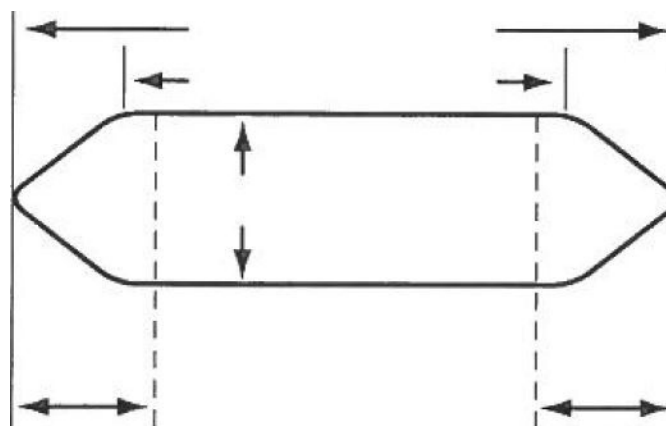
Slot/tooth w: 0.187

Wire weight: 1210

Vents: Size

Rotor bars:

COIL

☐ LeftConnection End  
(Facing Terminal Box)☐ Right**WEST TENNESSEE**7030 Ryburn Drive  
Millington, TN 38053  
Phone 901-873-5300  
Fax 901-873-5301**CENTRAL ARKANSAS**6812 Lindsey Rd.  
Little Rock, AR 72206  
Phone 501-375-9178  
Fax 501-375-4254



MILLINGTON, TN

LITTLE ROCK, AR

**Single Phase**

Split Phase ☐  
Capacitor: ☐ Start ☐ Start & Run ☐ Perm. Split

Hp/kw: .45KW

RPM: 3600/400

Manufacturer: Elmo

	Run	Start	Type:	Volts:	208/240
No. Slots			Model:	Amps:	3/6
No. Poles			Style:	Hertz:	
Coils/pole			Form:	Frame:	
Dwg No.			C Rise:	Hrs.:	Cap. Mfd.:
Wire Size			Serial#:		
Wires in par.			Duty: —	<input type="checkbox"/> BB	<input type="checkbox"/> SB
No. Circuits			Open: —		
Coil Ext.			Sta.length:	Sta.b.i.:	
Stator Bore					

Running ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Slot No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Starting ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Customer: Ark Dust Control

(Please return a copy to EASA Headquarters, 1331 Baur Blvd., St. Louis, MO 63132)

**WEST TENNESSEE**

7030 Ryburn Drive  
Millington, TN 38053  
Phone 901-873-5300  
Fax 901-873-5301

**CENTRAL ARKANSAS**

6812 Lindsey Rd.  
Little Rock, AR 72206  
Phone 501-375-9178  
Fax 501-375-4254

## AC Stator Form Coil Data

1. Core bore diameter
2. Total core length
3. Back iron
4. No. of vents
5. Width of vents
6. Finger plate width
7. Overall coil length
8. Connection end extension
9. Opposite Conn. End Ext.
10. Straight length bottom side
11. Straight length top side
12. Small knuckle drop. CE
13. Large knuckle drop. CE
14. Conn. Support Ring from core
15. Opp. Conn. Supp. Ring from core
16. Connection support ring ID
17. Opp. Conn. Supp. Ring ID
18. Total slot depth
19. Slot depth under wedge
20. Slot width

OCE

OCE



## AC Stator Form Coil Data (Continued)

21. Lead location ☐ A ☐ B ☐ C ☐ D

22. Coil type ☐ Left hand ☐ Right hand

23. Coil leads Long# LG

Short# LG

☐ Out ☐ Down

24. Jumper —

25. Connection —

26. No. of circuits

27. No. of slots

28. Coil throw 1-

29. Turns per coil

30. Total wires in parallel

31. Bare wire sizes ( ) x

( ) x

32. Strand insulation

☐ Film ☐ Glass ☐ Mica ☐ Bare ☐ Other

33. Coil weight Lbs.

34. Groups of Coils

Groups of Coils

35. Iron skewed ☐ Right ☐ Left in




# AC Stator Form Coil Data (Continued)

## Special Features      Yes      No

Data change      ☐      ☐

Coil support ring steel      ☐      ☐

Terrace wound      ☐      ☐

Corona Protection      ☐      ☐

RTDs      ☐      ☐

Ohms      Qty

Hermetic      ☐      ☐

Slot paper used      ☐      ☐

Insulation class      ☐ B      ☐ F      ☐ H

☐ VPI      ☐ Dip & Bake      ☐ Sealed

☐ Leads taped      ☐ Leads sleeved

Comments

