



MILLINGTON, TN

LITTLE ROCK, AR

## Job Information

Job #: 95674

Date: June 26, 2019

Priority: —

Authorized OT: No

Authorized by:

## Customer Information

Name: Johnson Control

Motor#:

## Name Plate Information

Manufacturer:	US Pump	Enclosure :	Open Drop Proof (ODP)	Horsepower/kW:	200
Serial#:	K12-20056744-ST-02	Model#:	H0200V2SLH-C	Service Factor:	1.15
Frame:	H445TPA	Rated RPM:	1785	Rated Voltage:	460
Phase:	3	Rated Amps:	228	Cycles:	60

Special design: No

## AC Electrical Inspection

Megs after rewind: Good Surge after rewind: Good Hi-pot after rewind: Good

Core loss: Good Thermistors: None Thermostat: None

RTD: None ohms at degrees C

Motor Heater(s) Present: Yes Qty: Voltage: Wattage:

**WEST TENNESSEE**  
7030 Ryburn Drive  
Millington, TN 38053  
Phone 901-873-5300  
Fax 901-873-5301

**CENTRAL ARKANSAS**  
6812 Lindsey Rd.  
Little Rock, AR 72206  
Phone 501-375-9178  
Fax 501-375-4254



MILLINGTON, TN

LITTLE ROCK, AR

## AC Electrical Inspection (Continued)


### Core Test Data

	Flux	Watts	Watts loss per lb	Condition of iron
Before burnout	85.251	0.476	0.655	157
After burnout	85.251	0.576	0.782	155

## Conclusion

Service Tech name: RHR

Service Tech signature:

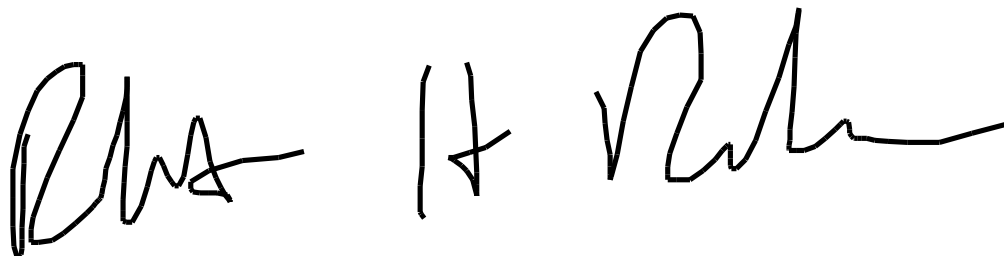

#### WEST TENNESSEE

7030 Ryburn Drive  
Millington, TN 38053  
Phone 901-873-5300  
Fax 901-873-5301

#### CENTRAL ARKANSAS

6812 Lindsey Rd.  
Little Rock, AR 72206  
Phone 501-375-9178  
Fax 501-375-4254

# Polyphase AC Winding

Polyphase Date: June 26, 2019

Hp/kw:	200	RPM:	1785	Poles:		Manufacturer:	US Pump
Slots:	72	Type:		Volts:	460		
Coils:	72	Model:	H0200V2SLH-C	Amps:	228		
<div style="border: 1px solid black; padding: 5px; display: inline-block;"> 12 Of 6 Grouping Of </div>		Serial#:	K12-20056744-ST-02	Phase:	3		
		Lead marking:	1-2-3-7-8-9	Hertz:	60		

Turns/Coil:	898989	Lead length:	16	C Rise:		Frame:	H445TPA
Wire Size	15 16	Lead size:	2	Duty:		C AMB:	
Wire Mult.	1 7	Num. Leads:	6	Eff.:		Ins. Cls.:	F
Pitch 1 to:	16	<input checked="" type="checkbox"/> DP	<input type="checkbox"/> TEFC	<input type="checkbox"/> XPRF	<input type="checkbox"/> TENV	S.F.:	1.15

Connection: 2D-2D PWS

Jumper:

Core length: 14.75

Core ID: 11.0

Back iron: 0.875

Slot depth: 1.75


Slot/tooth w: 0.280

Wire weight: 200

Vents: Size

Rotor bars:

COIL

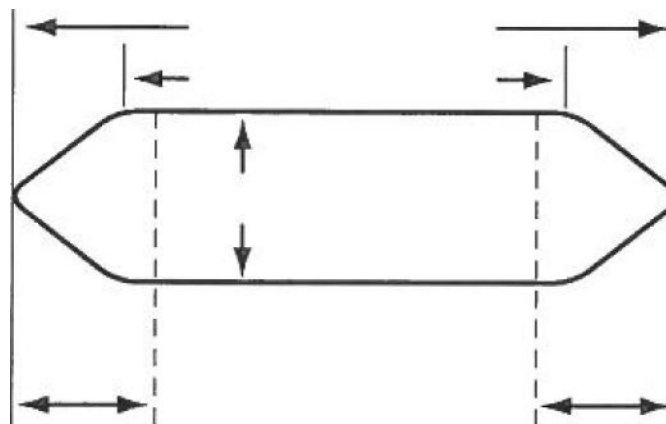
Connection End  
(Facing Terminal Box)

☒ Left

☐ Right



MILLINGTON, TN

LITTLE ROCK, AR

**Single Phase**

Split Phase ☐  
Capacitor: ☐ Start ☐ Start & Run ☐ Perm. Split

Hp/kw: 200

RPM: 1785

Manufacturer: US Pump

Run

Start

Type:

Volts: 460

Model: H0200V2SLH-C

Amps: 228

Style:

Hertz:

Form:

Frame:

No. Slots

No. Poles

Coils/pole

Dwg No.

C Rise:

Hrs.:

Cap. Mfd.:

Wire Size

Serial#: K12-20056744-ST-02

Wires in par.

Duty: —

☐ BB☐ SB

No. Circuits

Open: —

Coil Ext.

Sta.length:

Sta.b.i.:

Stator Bore

Running ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Slot No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Starting ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Customer: Johnson Control

(Please return a copy to EASA Headquarters, 1331 Baur Blvd., St. Louis, MO 63132)

**WEST TENNESSEE**  
7030 Ryburn Drive  
Millington, TN 38053  
Phone 901-873-5300  
Fax 901-873-5301

**CENTRAL ARKANSAS**  
6812 Lindsey Rd.  
Little Rock, AR 72206  
Phone 501-375-9178  
Fax 501-375-4254

## AC Stator Form Coil Data

1. Core bore diameter
2. Total core length
3. Back iron
4. No. of vents
5. Width of vents
6. Finger plate width
7. Overall coil length
8. Connection end extension
9. Opposite Conn. End Ext.
10. Straight length bottom side
11. Straight length top side
12. Small knuckle drop. CE
13. Large knuckle drop. CE
14. Conn. Support Ring from core
15. Opp. Conn. Supp. Ring from core
16. Connection support ring ID
17. Opp. Conn. Supp. Ring ID
18. Total slot depth
19. Slot depth under wedge
20. Slot width

OCE

OCE



## AC Stator Form Coil Data (Continued)

21. Lead location ☐ A ☐ B ☐ C ☐ D

22. Coil type ☐ Left hand ☐ Right hand

23. Coil leads Long# LG

Short# LG

☐ Out ☐ Down

24. Jumper —

25. Connection —

26. No. of circuits

27. No. of slots

28. Coil throw 1-

29. Turns per coil

30. Total wires in parallel

31. Bare wire sizes ( ) x

( ) x

32. Strand insulation

☐ Film ☐ Glass ☐ Mica ☐ Bare ☐ Other

33. Coil weight Lbs.

34. Groups of Coils

Groups of Coils

35. Iron skewed ☐ Right ☐ Left in




# AC Stator Form Coil Data (Continued)

## Special Features      Yes      No

Data change      ☐      ☐

Coil support ring steel      ☐      ☐

Terrace wound      ☐      ☐

Corona Protection      ☐      ☐

RTDs      ☐      ☐

Ohms      Qty

Hermetic      ☐      ☐

Slot paper used      ☐      ☐

Insulation class      ☐ B      ☐ F      ☐ H

☐ VPI      ☐ Dip & Bake      ☐ Sealed

☐ Leads taped      ☐ Leads sleeved

Comments

