

### **Job Information**

Job #: 95741 Date: July 30, 2019

Priority: — Authorized OT: No Authorized by:

### **Customer Information**

Name: Welspun Motor#:

#### **Name Plate Information**

Manufacturer: AJAY Enclosure: Open Drop Proof Horsepower/kW: 25

(ODP)

Serial#: 27330 Model#: Service Factor:

Frame: Rated RPM: 3450 Rated Voltage: 480

Phase: 3 Rated Amps: 33 Cycles: 60

Special design: No

## **AC Electrical Inspection**

Megs after rewind: Good Surge after rewind: Good Hi-pot after rewind: Good

Core loss: Good Thermistors: None Thermostat: None

RTD: None ohms at degrees C

Motor Heater(s) Present: Yes Qty: Voltage: Wattage:



### **AC Electrical Inspection (Continued)**

#### **Core Test Data**

Flux Watts Watts loss per lb Condition of iron

Before burnout

After burnout 85.450 0.512 2.023 145

#### Conclusion

Service Tech name: RHR

Service Tech signature:

WA GAY



## **Polyphase AC Winding**

Hp/kw: 25 RPM:

3450

Poles:

Polyphase Date: 2 Manufacturer:

**AJAY** 

Slots:

36

Type:

43PH25

Volts:

480

Coils:

18

Model:

Amps:

33

6

Of 3 Serial#:

27330

Phase:

3

Grouping

Of

Lead marking:

Hertz:

60

Turns/Coil:

Lead length:

Lead size:

1

12

6

C Rise:

Duty:

Eff.:

Frame:

C AMB:

Wire Size Wire Mult. 16

1

17

2

1

16

19

1Y1D

14

□ DP

Num.Leads:

TEFC

XPRF

TENV

Ins.Cls.: S.F.:

Connection:

Pitch 1 to:

Jumper:

Core length:

8.875

Core ID: Back iron:

1.375

5.375

Slot depth:

0.75

Slot/tooth w:

0.250


24

Wire weight:

Vents:

Size

Rotor bars:

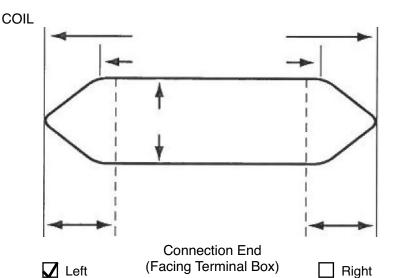





Single Phase				Split Phase   Capacitor: Start Start & Run Perm. Split									01:4					
				·	Сар	acitor:	L	51	art	L	518	an & H	un	' Ш	erm.	Split		
Hp/kw:	25			RPM:	3	450			Manu	facture	er:	AJAY						
		Run		Start			Type:							٧	olts:	480		
						1	Model:							Ar	nps:	33		
No. Slots	5						Style:							Н	ertz:			
No. Poles	3						Form:							Fra	ame:			
Coils/pole	e																	
Dwg No							C Ris	e:			Hrs.:			Ca	ap. Mf	d.:		
Wire Size	Э					S	erial#:	2	27330									
Wires in par							Du	ty: -	_					E	3B		SB	
No. Circuits	5						Оре	n: -										
Coil Ext.				Sta.length:							Sta.b.i.:							
Stator Bore	Э																	
			I															
Running	g 🔲																	
Slot No	. 1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Starting	9 🗆																	
Customer	: V	Velspu	n															

(Please return a copy to EASA Headquarters, 1331 Baur Blvd., St. Louis, MO 63132)



### **AC Stator Form Coil Data**


- 1. Core bore diameter
- 2. Total core length
- 3. Back iron
- 4. No. of vents
- 5. Width of vents
- 6. Finger plate width
- 7. Overall coil length
- 8. Connnection end extension
- 9. Opposite Conn. End Ext.
- 10. Straight length bottom side
- 11. Straight length top side
- 12. Small knuckle drop. CE


OCE


13. Large knuckle drop. CE


OCE

- 14. Conn. Support Ring from core
- 15. Opp. Conn. Supp. Ring from core
- 16. Connection support ring ID
- 17. Opp. Conn. Supp. Ring ID
- 18. Total slot depth
- 19. Slot depth under wedge
- 20. Slot width

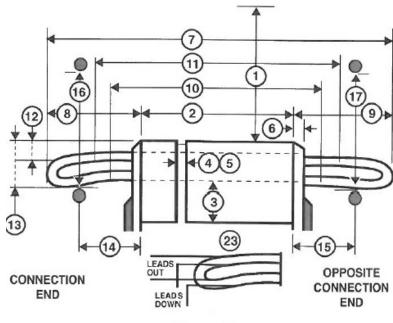









CENTRAL ARKANSAS



# **AC Stator Form Coil Data (Continued)**

21. Lead location A B C D

23. Coil leads Long# LG

Short# LG

Out Down

24. Jumper —

25. Connection —

26. No. of circuits

27. No. of slots

28. Coil throw

29. Turns per coil

30. Total wires in parallel

31. Bare wire sizes ( ) x

( ) x

32. Strand insulation


☐ Film ☐ Glass ☐ Mica ☐ Bare ☐ Other


33. Coil weight Lbs.


34. Groups of Coils

Groups of Coils

35. Iron skewed Right Left in

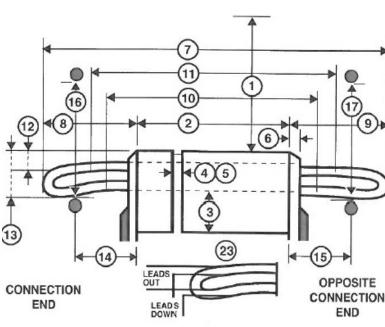

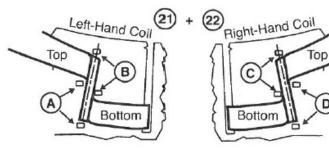







## **AC Stator Form Coil Data (Continued)**

Special Features	Yes	No					
Data change							
Coil support ring steel							
Terrace wound							
Corona Protection							
RTDs							
Ohms Qty							
Hermetic							
Slot paper used							
Insulation class B F H							
☐ VPI ☐ Dip & Bake ☐ Sealed							
Leads taped	Leads s	leeved					
Comments							

