



MILLINGTON, TN

LITTLE ROCK, AR

Job Information

Job #: 95850

Date: August 19, 2019

Priority: —

Authorized OT: No

Authorized by:

Customer Information

Name: Vilonia Water

Motor#:

Name Plate Information

Manufacturer: Siemens

Enclosure : Open Drop Proof
(ODP)

Horsepower/kW: 30

Serial#: E0802/5114271

Model#: 1LA9206-2W90-Z

Service Factor:

Frame: 200L

Rated RPM: 3555

Rated Voltage: 230/460

Phase: 3

Rated Amps: 102/51

Cycles: 60

Special design: No

AC Electrical Inspection

Megs after rewind: Good

Surge after rewind: Good

Hi-pot after rewind: Good

Core loss: Good

Thermistors: None

Thermostat: None

RTD: None

ohms at

degrees C

Motor Heater(s) Present: Yes

Qty:

Voltage:

Wattage:

WEST TENNESSEE
7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301

CENTRAL ARKANSAS
6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254



MILLINGTON, TN

LITTLE ROCK, AR

AC Electrical Inspection (Continued)

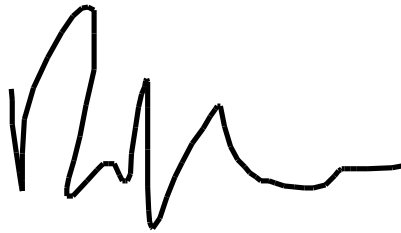


Core Test Data

	Flux	Watts	Watts loss per lb	Condition of iron
Before burnout	84.760	0.607	1.739	137
After burnout	84.450	0.624	1.951	126

Conclusion

Service Tech name: RHR

Service Tech signature:



WEST TENNESSEE

7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301

CENTRAL ARKANSAS

6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254

Polyphase AC Winding

Polyphase Date: August 19, 2019

Hp/kw: 30 RPM: 3555 Poles: 2 Manufacturer: Siemens

Slots: 36 Type: Volts: 230/460

Coils: 36 Model: 1LA9206-2W90-Z Amps: 102/51

Serial#: E0802/5114271 Phase: 3

Lead marking: 1-12 Hertz:

6 Of 6
Grouping
Of

Turns/Coil: 6 Lead length: 12 C Rise: Frame: 200L

Wire Size 17 18 Lead size: 10 Duty: C AMB:

Wire Mult. 1 8 Num.Leads: 12 Eff.: Ins.Cls.:

Pitch 1 to: 16 ☐ DP ☐ TEFC ☐ XPRF ☐ TENV S.F.:

Connection: 1&2Cir

Jumper:

Core length: 8.5

Core ID: 7.0

Back iron: 1.5

Slot depth: 1.0

Slot/tooth w: 0.284

Wire weight: 36

Vents: Size

COIL


☒ Left

Connection End
(Facing Terminal Box)

☐ Right

Rotor bars:



MILLINGTON, TN

LITTLE ROCK, AR

Single Phase

Split Phase ☐
Capacitor: ☐ Start ☐ Start & Run ☐ Perm. Split

Hp/kw: 30

RPM: 3555

Manufacturer: Siemens

Run

Start

Type:

Volts: 230/460

Model: 1LA9206-2W90-Z

Amps: 102/51

No. Slots

Style:

Hertz:

No. Poles

Form:

Frame:

Coils/pole

Dwg No.

C Rise:

Hrs.:

Cap. Mfd.:

Wire Size

Serial#: E0802/5114271

Wires in par.

Duty: —

☐ BB☐ SB

No. Circuits

Open: —

Coil Ext.

Sta.length:

Sta.b.i.:

Stator Bore

Running ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Slot No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Starting ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Customer: Vilonia Water

(Please return a copy to EASA Headquarters, 1331 Baur Blvd., St. Louis, MO 63132)

WEST TENNESSEE

7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301

CENTRAL ARKANSAS

6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254

AC Stator Form Coil Data

1. Core bore diameter
2. Total core length
3. Back iron
4. No. of vents
5. Width of vents
6. Finger plate width
7. Overall coil length
8. Connection end extension
9. Opposite Conn. End Ext.
10. Straight length bottom side
11. Straight length top side
12. Small knuckle drop. CE
13. Large knuckle drop. CE
14. Conn. Support Ring from core
15. Opp. Conn. Supp. Ring from core
16. Connection support ring ID
17. Opp. Conn. Supp. Ring ID
18. Total slot depth
19. Slot depth under wedge
20. Slot width

OCE

OCE



AC Stator Form Coil Data (Continued)

21. Lead location ☐ A ☐ B ☐ C ☐ D

22. Coil type ☐ Left hand ☐ Right hand

23. Coil leads Long# LG

Short# LG

☐ Out ☐ Down

24. Jumper —

25. Connection —

26. No. of circuits

27. No. of slots

28. Coil throw 1-

29. Turns per coil

30. Total wires in parallel

31. Bare wire sizes () x

() x

32. Strand insulation

☐ Film ☐ Glass ☐ Mica ☐ Bare ☐ Other

33. Coil weight Lbs.

34. Groups of Coils

Groups of Coils

35. Iron skewed ☐ Right ☐ Left in


AC Stator Form Coil Data (Continued)

Special Features Yes No

Data change ☐ ☐

Coil support ring steel ☐ ☐

Terrace wound ☐ ☐

Corona Protection ☐ ☐

RTDs ☐ ☐

Ohms Qty

Hermetic ☐ ☐

Slot paper used ☐ ☐

Insulation class ☐ B ☐ F ☐ H

☐ VPI ☐ Dip & Bake ☐ Sealed

☐ Leads taped ☐ Leads sleeved

Comments

