



MILLINGTON, TN

LITTLE ROCK, AR

Job Information

Job #: 96235

Date: December 3,
2019

Priority: —

Authorized OT: No

Authorized by:

Customer Information

Name: KORDSMEIER

Motor#:

Name Plate Information

Manufacturer: Bald or

Enclosure : Open Drop Proof
(ODP)

Horsepower/kW: 60

Serial#: Z0601230245

Model#: 42H074W390H2

Service Factor: 1.15

Frame: 364TC

Rated RPM: 1770

Rated Voltage: 230/460

Phase: 3

Rated Amps: 144/72

Cycles: 60

Special design: No

AC Electrical Inspection

Megs after rewind: Good

Surge after rewind: Good

Hi-pot after rewind: Good

Core loss: Good

Thermistors: None

Thermostat: None

RTD: None

ohms at

degrees C

Motor Heater(s) Present: Yes

Qty:

Voltage:

Wattage:

WEST TENNESSEE7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301**CENTRAL ARKANSAS**6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254



MILLINGTON, TN

LITTLE ROCK, AR

AC Electrical Inspection (Continued)

Core Test Data

	Flux	Watts	Watts loss per lb	Condition of iron
Before burnout	85.008	0.621	1.703	163
After burnout	85.300	0.709	3.273	257

Conclusion

Service Tech name: RHR

Service Tech signature:

WEST TENNESSEE

7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301

CENTRAL ARKANSAS

6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254

Polyphase AC Winding

Polyphase Date: December 3, 2019

Hp/kw: 60

RPM: 1770

Poles:

4 Manufacturer: Bald or

Slots: 48

Type:

Volts: 230/460

Coils: 48

Model: 42H074W390H2

Amps: 144/72

12 Of 4

Grouping

Of

Serial#: Z0601230245

Phase: 3

Lead marking:

Hertz: 60

Turns/Coil: 14

Lead length: 12 C Rise: Frame: 364TC

Wire Size 18 19

Lead size: 6 Duty: Cont C AMB:

Wire Mult. 5 1

Num.Leads: 9 Eff.: Ins.Cls.: F

Pitch 1 to: 12

☐ DP ☐ TEFC ☐ XPRF ☐ TENV S.F.: 1.15

Connection: 2&4D

Jumper:

Core length: 6.5

Core ID: 8.625

Back iron: 1.25

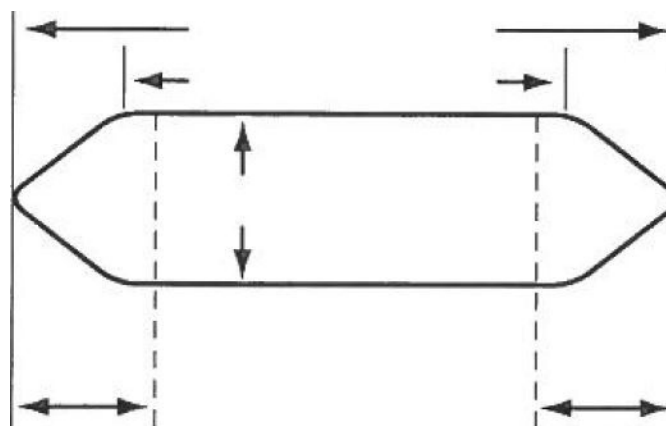
Slot depth: 1.125

Slot/tooth w: 0.284

Wire weight: 60

Vents: Size

COIL


☒ Left

Connection End
(Facing Terminal Box)

☐ Right

Rotor bars:



MILLINGTON, TN

LITTLE ROCK, AR

Single Phase{ Split Phase ☐
Capacitor: ☐ Start☐ Start & Run☐ Perm. Split

Hp/kw: 60

RPM: 1770

Manufacturer: Bald or

Run

Start

Type:

Volts: 230/460

Model: 42H074W390H2

Amps: 144/72

Style:

Hertz:

Form:

Frame:

Coils/pole

Dwg No.

C Rise:

Hrs.:

Cap. Mfd.:

Wire Size

Serial#: Z0601230245

Wires in par.

Duty: —

☐ BB☐ SB

No. Circuits

Open: —

Coil Ext.

Sta.length:

Sta.b.i.:

Stator Bore

Running ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Slot No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Starting ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Customer: KORDSMEIER

(Please return a copy to EASA Headquarters, 1331 Baur Blvd., St. Louis, MO 63132)

WEST TENNESSEE
7030 Ryburn Drive
Millington, TN 38053
Phone 901-873-5300
Fax 901-873-5301

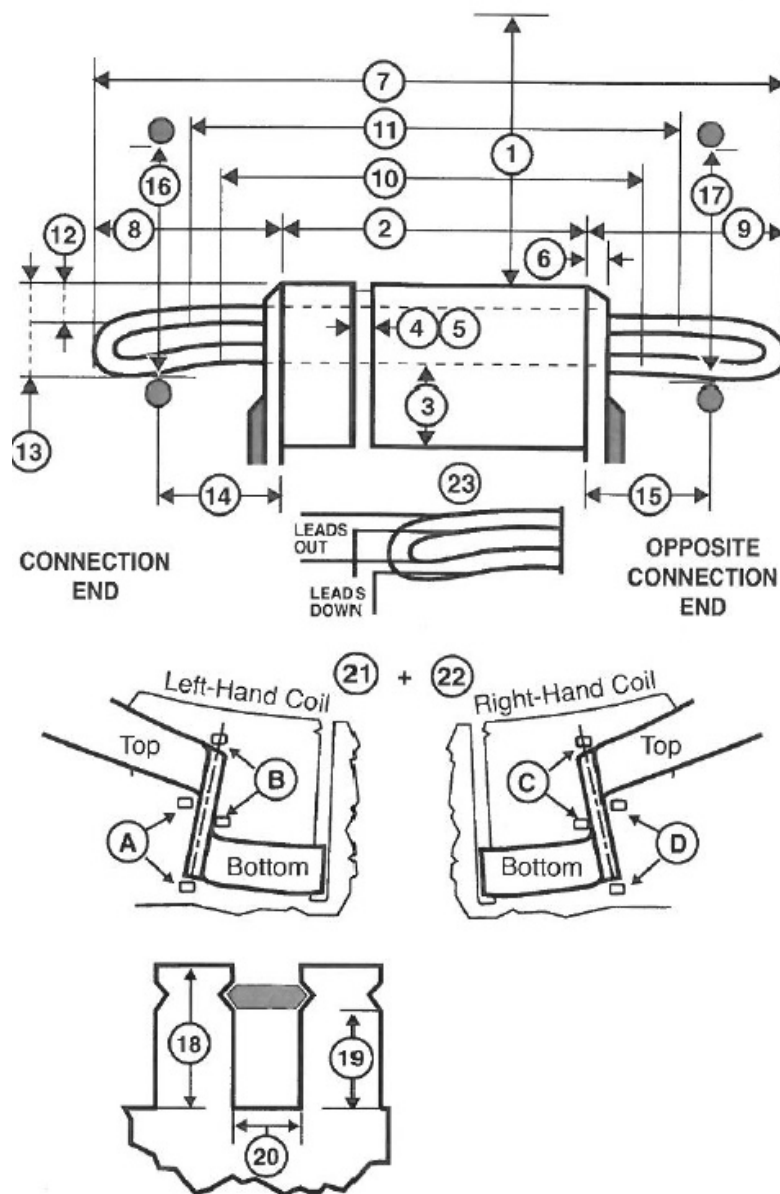
CENTRAL ARKANSAS
6812 Lindsey Rd.
Little Rock, AR 72206
Phone 501-375-9178
Fax 501-375-4254

AC Stator Form Coil Data

1. Core bore diameter
2. Total core length
3. Back iron
4. No. of vents
5. Width of vents
6. Finger plate width
7. Overall coil length
8. Connection end extension
9. Opposite Conn. End Ext.
10. Straight length bottom side
11. Straight length top side
12. Small knuckle drop. CE
13. Large knuckle drop. CE
14. Conn. Support Ring from core
15. Opp. Conn. Supp. Ring from core
16. Connection support ring ID
17. Opp. Conn. Supp. Ring ID
18. Total slot depth
19. Slot depth under wedge
20. Slot width

OCE

OCE



AC Stator Form Coil Data (Continued)

21. Lead location ☐ A ☐ B ☐ C ☐ D

22. Coil type ☐ Left hand ☐ Right hand

23. Coil leads Long# LG

Short# LG

☐ Out ☐ Down

24. Jumper —

25. Connection —

26. No. of circuits

27. No. of slots

28. Coil throw 1-

29. Turns per coil

30. Total wires in parallel

31. Bare wire sizes () x

() x

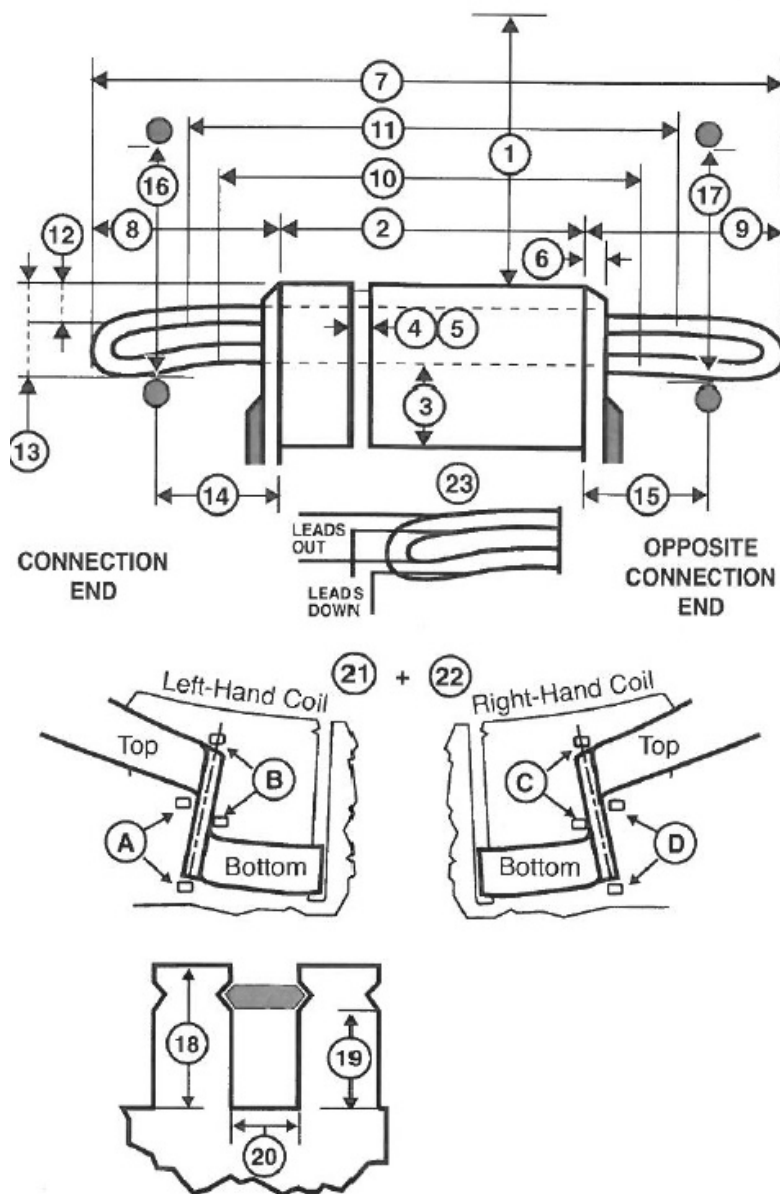
32. Strand insulation

☐ Film ☐ Glass ☐ Mica ☐ Bare ☐ Other

33. Coil weight Lbs.

34. Groups of Coils

Groups of Coils

35. Iron skewed ☐ Right ☐ Left in


AC Stator Form Coil Data (Continued)

Special Features	Yes	No
------------------	-----	----

Data change	☐	☐
-------------	--------------------------	--------------------------

Coil support ring steel	☐	☐
-------------------------	--------------------------	--------------------------

Terrace wound	☐	☐
---------------	--------------------------	--------------------------

Corona Protection	☐	☐
-------------------	--------------------------	--------------------------

RTDs	☐	☐
------	--------------------------	--------------------------

Ohms Qty		
----------	--	--

Hermetic	☐	☐
----------	--------------------------	--------------------------

Slot paper used	☐	☐
-----------------	--------------------------	--------------------------

Insulation class	☐ B	☐ F	☐ H
------------------	----------------------------	----------------------------	----------------------------

☐ VPI	☐ Dip & Bake	☐ Sealed
------------------------------	-------------------------------------	---------------------------------

☐ Leads taped	☐ Leads sleeved
--------------------------------------	--

Comments

