

Motor Shop Repairs

Job Number 97425

Prepared for Advanced Fluid Technologies (11316)

7801 Warden Rd Sherwood AR 72120

Table of Contents



Hi-Speed Industrial Service disclaims all warranties, both express and implied, relating to the information, reports, opinions and analysis disclosed to the Customer by Hi-Speed. Hi-Speed shall not be liable for any errors or omissions, or any losses, injury or damages arising from the use of such information, reports, opinions and analysis by the Customer.

Printed on 10/14/2020 Powered by INSPECTALL Table of Contents





AC Recondition Repair Report

Advanced Fluid Technologies (11316) 7801 Warden Rd Sherwood, AR 72120 Performed By: Motor Shop LR Date Completed: 10/13/2020 FolderID: 97425 FormID: 9100519

| Gene | ral | | |
|--------|--------------------------------|--------------------------------|----|
| 1. | Job Number | 97425 | |
| 2. | Report Date | 10/12/2020 | |
| 3. | Customer | ADVANCED FLUID TECHNOLOGIES | |
| lame | Plate Information | | O |
| 4. | Manufacturer | HEW | Р |
| 5. | Model | DEXF 160M2K | |
| 6. | Serial Number | PTB 99 ATEX 1114 | |
| 7. | Horsepower | 14.75 HP | |
| 8. | KW | 11 KW | |
| 9. | Volts | 460 Volts | |
| 10. | Amps | 21.2 Amps | |
| 11. | RPM | 3515 RPM | |
| 12. | Frame | 112G EEX d11C T4 | |
| 13. | Enclosure | tefc | |
| 14. | Cycles | 60 HZ | |
| 15. | Phase | 3 PH | |
| 16. | Service Factor | | |
| 17. | Motor Mount Position | Flange Mount | |
| nitial | Inspection | | 0 |
| 18. | Number of Leads | 6 | P1 |
| 19. | Lead Length | 6 Inches | |
| 20. | Lead Size | 12 | |
| 21. | Lead Condition | (P) Pass | |
| 22. | Lead Markings | Metal Tags | |
| 23. | Lug Size, Condition, and Type | | |
| | 5/16 #12 Good Coated | | |
| 24. | Winding RTD's | (Y) Yes | |
| 25. | Winding Rtd's Condition | (P) Pass | |
| - | 202 Ohms | | |
| 26. | Shaft Run Out | 0.001 | P8 |
| - | ODE .0005 | | |
| 27. | Does Shaft Turn Freely | yes | |
| 28. | Does Shaft Have Visible Damage | no | |

| 30. Bearing Rtd's Condition (NA) Not Applicable P101 31. Contamination None 32. Frame Condition (P) Pass 33. Fan Condition (P) Pass P103 34. Broken or missing components None Initial Electric Test 35. Resistance to Ground 36. Winding Resistance 1-2 37. Winding Resistance 2-3 38. Winding Resistance 2-3 39. Winding Resistance 1-3 39. Resistive Imbalance 40. HI-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location good 43. Failure Location good 44. Faiture Location good 45. Air Gap <10% Variation 46. Number of Rotor Bars 47. Number of Broken Rotor Bars 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass 49. Rotor Condition (P) Pass 49. Rotor Condition (P) Pass 49. Bearing DE Size (Sa99 2Z P14) 50. Bearing Manufacture FAG 51. Bearing DE Size (Sa99 2Z P14) 52. Bearing DE Type Deep Groove Ball 53. DE Bearing QDE Type Deep Groove Ball 54. Bearing ODE Size (Sa99 2Z P14) 55. Bearing ODE Size (Sa99 2Z P14) 56. ODE Bearing QDE Size (Sa99 2Z P14) 57. Insulated Bearing (P) Pass 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (P) Pass 60. DE Seal Type/Size (Sa94 S045×10) 61. Shaft Grounding Device (N) No 61. Shaft Grounding Device (N) No 62. DE Seal (P) Yes P8 63. Component Failure 64. Component Failure 65. Component Failure 66. Component Failure 67. Cause of Failure 68. Comments | | 29. | Bearing Rtd's (N) I | No |
|--|----|-------|---------------------------------------|----------------|
| Name | | | • | |
| 32. Frame Condition (P) Pass P109 | | 31. | · · · · · · · · · · · · · · · · · · · | |
| 33. Fan Condition (P) Pass P109 34. Broken or missing components None Initial Electric Test 35. Resistance to Ground 36. Winding Resistance 1-2 37. Winding Resistance 2-3 38. Winding Resistance 2-3 39. Resistive Imbalance 40. HI-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum 45. Air Cap <10% Variation 46. Number of Broken Rotor Bars 47. Number of Broken Rotor Bars 49. Rotor Condition (P) Pass 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 22 P14 52. Bearing DE Size 6309 22 P14 53. DE Bearing ODE Type Deep Groove Ball 54. Bearing ODE Size 6309 22 P43 55. Bearing ODE Size 6309 22 P43 56. ODE Bearing ODF Type Deep Groove Ball 57. Insulated Bearing none 58. Lubrication Type Polytex EM 59. Grease Condition (P) Pass 60. Bearing Resistance 1-2 50. Bearing Resistance 1-2 51. Bearing DE Size 6309 22 P43 52. Bearing DE Size 6309 22 P43 53. DE Bearing ODE Size 6309 22 P43 54. Bearing ODE Size 6309 22 P43 55. Bearing ODE Size 6309 22 P43 56. ODE Bearing OD; 1 1 57. Insulated Bearing none 58. Lubrication Type Polytex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal (Y) Yes P86 64. ODE Seal (Y) Yes P86 65. ODE Seal (Y) Yes P86 66. Component Failure 66. Component Failure 66. Component Failure 66. Component Failure 67. Cause of Failure 68. Component Failure | | | None | |
| Initial Electric Test 35. Resistance to Ground 36. Winding Resistance 2-3 38. Winding Resistance 2-3 39. Winding Resistance 1-3 39. Resistive Imbalance 40. HI-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum P4 45. Air Caga P10% Variation 46. Number of Rotor Bars 30 47. Number of Rotor Bars 00 48. Grover Test (P) Pass 49. Rotor Condition (P) Pass 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z P14 52. Bearing DE Size 6309 2Z P14 53. DE Bearing OUT. 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Size 6309 2Z P43 56. ODE Bearing OUT. 57. Insulated Bearing 10. 1 58. Bearing ODE Size 6009 2Z P43 59. Greas Condition (P) Pass 60. Bearing Resistance 3 Polyre Polyrex EM 59. Greas Condition (P) Pass 60. Bearing Resistance 3 Polyre Polyrex EM 60. Bearing OUT. 61. Shaft Crounding Device (N) No 62. DE Seal 63. DE Seal Type/Size 80x45x10 64. ODE Seal 65. ODE Seal Type/Size 80x45x10 66. Component Failure none 67. Cause of Failure | | 32. | Frame Condition (P) Pa | SS |
| None Initial Electric Test | | 33. | Fan Condition (P) Pa | ss P109 |
| Initial Electric Test 35. Resistance to Ground 36. Winding Resistance 1-2 37. Winding Resistance 2-3 38. Winding Resistance 1-3 39. Resistive Imbalance 40. HI-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum P4. Air Gap < 10% Variation 45. Air Gap < 10% Variation 46. Number of Rotor Bars 30 47. Number of Broken Rotor Bars 30 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass 49. Rotor Gap (P) | | 34. | Broken or missing components | |
| 36. Resistance to Ground 36. Winding Resistance 1-2 37. Winding Resistance 2-3 38. Winding Resistance 1-3 39. Resistive Imbalance 40. Hi-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum P4 45. Air Gap +10% Variation 46. Number of Rotor Bars 30 47. Number of Broken Rotor Bars 00 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass 49. Rotor Condition (P) Pass 49. Rotor Condition (P) Pass 50. Bearing DE Size 6099 22 P14 51. Bearing DE Size 6099 22 P14 52. Bearing DE Type Deep Groove Ball 53. DE Bearing ODE Type Deep Groove Ball 54. Bearing ODE Size 6099 22 P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing ODY 57. Insulated Bearing ODE 58. Lubrication Type Deep Groove Ball 59. Grease Condition (P) Pass 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P66 61. Shaft Grounding Device (N) No 62. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P66 65. DE Seal Type/Size 80x45x10 66. ODE Seal Type/Size 80x45x10 66. Component Failure 66. Component Failure 66. Component Failure 67. Cause of Failure 66. Component Failure 67. Cause of Failure 67. Cause of Failure | | | None | |
| 36. Winding Resistance 1-2 37. Winding Resistance 2-3 38. Winding Resistance 2-3 39. Resistive Imbalance 40. Hi-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum P4 45. Air Gap <10% Variation 46. Number of Rotor Bars 30 47. Number of Broken Rotor Bars 00 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass 50. Bearing DE Type Deep Groove Ball 51. DE Bearing Qty. 1 52. Bearing ODE Type Deep Groove Ball 53. DE Bearing Qty. 1 54. Bearing ODE Type Deep Groove Ball 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 57. Insulated Bearing 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (P) Pass 60. Bearing Retainers (P) Pass 60. Bearing Retainers 60. Calse Seal (P) Polyrex EM 61. Shaft Grounding Device (N) No 62. DE Seal (P) Polyrex EM 63. ODE Seal Type/Size 80x45x10 66. Component Failure 66. Component Failure 67. Cause of Failure 68. Component Failure 68. Component Failure 68. Component Failure 68. Component Failure | In | itial | Electric Test | |
| 37. Winding Resistance 2-3 38. Winding Resistance 1-3 39. Resistive Imbalance 40. Hi-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum P4 45. Air Gap <10% Variation 46. Number of Rotor Bars 30 47. Number of Broken Rotor Bars 0 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass 49. Rotor Condition (P) Pass 49. Rotor Condition (P) Pass 50. Bearing Manufacture FAG 51. Bearing DE Type Bearing Qty. 1 52. Bearing ODE Size 6309 2Z P4 53. DE Bearing ODE Size 6309 2Z P4 54. Bearing ODE Size 6309 2Z P4 55. Bearing ODE Size 6309 2Z P4 56. ODE Bearing Qty. 1 57. Insulated Bearing Qty. 1 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P7 61. Shaft Grounding Device (N) No 62. DE Seal 63. DE Seal (Y) Yes P8 63. DE Seal (Y) Yes P8 64. ODE Seal (Y) Yes P8 65. ODE Seal (Y) Yes P8 66. ODE Seal (Y) Yes P8 66. Component Failure 66. Cause of Failure | | 35. | Resistance to Ground | |
| 38. Winding Resistance 1-3 39. Resistive Imbalance 40. Hi-Pot 41. Surge Test 42. Stator Condition 43. Failure Location 44. Rotor Type 45. Air Gap < 10% Variation 46. Number of Rotor Bars 47. Number of Broken Rotor Bars 48. Growler Test 49. Rotor Condition 49. Rotor Condition 40. Surge Test 40. Surge Test 41. Surge Test 42. Stator Condition 43. Air Gap < 10% Variation 44. Rotor Type 45. Air Gap < 10% Variation 46. Number of Broken Rotor Bars 47. Number of Broken Rotor Bars 48. Growler Test 49. Rotor Condition 40. Rotor Condition 41. Rotor Condition 42. Rotor Condition 43. Growler Test 44. Rotor Type 45. Bearing DE Size 49. Rotor Condition 40. Rotor Condition 41. Rotor Condition 42. Rotor Condition 43. Rotor Condition 44. Rotor Type 45. Bearing DE Size 49. Rotor Condition 46. Deep Groove Ball 47. Rotor Condition 48. Rotor Condition 49. Rotor Condition 49. Rotor Condition 40. Rotor Condition 41. Rotor Type 42. Rotor Condition 43. Rotor Condition 44. Rotor Type 45. Rotor Condition 46. Deep Groove Ball 47. Rotor Condition 46. Rotor Condition 47. Rotor Condition 48. Rotor Type 48. Rotor Condition 49. Pass 49. Rotor Condition 40. Rotor Type 40. Rotor Condition 40. Rotor Condition 40. Rotor Type 40. Rotor Condition 40. Rotor Type 41. Rotor Type 40. | | 36. | Winding Resistance 1-2 | |
| 39. Resistive Imbalance 40. Hi-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum P4 45. Air Gap <10% Variation 46. Number of Rotor Bars 30 47. Number of Broken Rotor Bars 00 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass Mechanical Inspection 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z P1 52. Bearing DE Type Deep Groove Ball 53. DE Bearing ODE Type Deep Groove Ball 55. Bearing ODE Size 6309 2Z P3 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Gly. 1 57. Insulated Bearing 59. Grease Condition (P) Pass 59. Grease Condition (P) Pass 60. Bearing Retainers (P) Pass 59. Grease Condition (P) Pass 61. Shaft Grounding Device (N) No 62. DE Seal 63. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P36 65. ODE Seal (Y) Yes P36 66. Component Failure 66. Component Failure 67. Cause of Failure 68. Component Failure 68. Component Failure 68. Component Failure 68. Component Failure 69. Cause of Failure 60. Cause of Failure 60. Cause of Failure | | 37. | Winding Resistance 2-3 | |
| 40. Hi-Pot 41. Surge Test (P) Pass 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum 45. Air Gay <10% Variation 46. Number of Rotor Bars 47. Number of Broken Rotor Bars 49. Rotor Condition (P) Pass 49. Rotor Condition (P) Pass Mechanical Inspection 50. Bearing Manufacture 51. Bearing DE Size 6309 2Z 71. Bearing DE Size 6309 2Z 72. P14 52. Bearing ODE Size 6309 2Z 73. DE Bearing Qty. 74. Bearing ODE Fype 75. Bearing ODE Fype 75. Bearing ODE Fype 75. Bearing ODE Fype 75. Insulated Bearing 76. ODE Seal 77 (Y) Yes 779 78. ODE Seal 77 (Y) Yes 78. ODE Seal 77 (X) Yes 78 (X) Yes 78 (X) Yes 79 | | 38. | Winding Resistance 1-3 | |
| 41. Surge Test | | 39. | Resistive Imbalance | |
| 42. Stator Condition good 43. Failure Location none Initial Rotor Inspection Image: Common of the common of th | | 40. | Hi-Pot | |
| 43. Failure Location none Initial Rotor Inspection 44. Rotor Type cast aluminum P4 45. Air Gap <10% Variation | | 41. | Surge Test (P) Pa | SS |
| Initial Rotor Inspection Cast aluminum P4 44. Rotor Type cast aluminum P4 45. Air Gap < 10% Variation | | 42. | Stator Condition god | d |
| 44. Rotor Type cast aluminum P4 45. Air Gap <10% Variation | | 43. | Failure Location nor | ıe |
| 45. Air Gap <10% Variation | In | itial | Rotor Inspection | O |
| 46. Number of Rotor Bars 30 47. Number of Broken Rotor Bars 0 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass Mechanical Inspection 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z P14 52. Bearing DE Type Deep Groove Ball 53. DE Bearing Qty. 1 1 54. Bearing ODE Type Deep Groove Ball 6309 2Z P43 55. Bearing QDE Type Deep Groove Ball 1< | | 44. | Rotor Type cast aluminu | m P4 |
| 47. Number of Broken Rotor Bars 0 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass Mechanical Inspection 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z P14 52. Bearing DE Type Deep Groove Ball 53. DE Bearing Qty. 1 1 54. Bearing ODE Type Deep Groove Ball 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 1 | | 45. | Air Gap <10% Variation | |
| 48. Growler Test (P) Pass 49. Rotor Condition (P) Pass Mechanical Inspection FAG 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z 52. Bearing DE Type Deep Groove Ball 53. DE Bearing Qty. 1 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 1 57. Insulated Bearing none 1 58. Lubrication Type Polyrex EM 9 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 Rost Seal 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Rost Cause of Failure Root Cause of Failure None None | | 46. | Number of Rotor Bars | 30 |
| 49. Rotor Condition (P) Pass Mechanical Inspection 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z P14 52. Bearing DE Type Deep Groove Ball Deep Groove Ball 53. DE Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball Deep Groove Ball 56. ODE Bearing Qty. 1 1 57. Insulated Bearing none Deep Groove Ball 58. Lubrication Type Polyrex EM Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No (Y) Yes P86 63. DE Seal (Y) Yes P86 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure none 67. Cause of Failure none None | | 47. | Number of Broken Rotor Bars | 0 |
| Mechanical Inspection 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z P14 52. Bearing DE Type Deep Groove Ball 53. DE Bearing Qty. 1 1 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 57. Insulated Bearing none 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 80x45x10 Root Cause of Failure Root Cause of Failure 66. Component Failure none 67. Cause of Failure none 67. Cause of Failure None N | | | . , | |
| 50. Bearing Manufacture FAG 51. Bearing DE Size 6309 2Z P14 52. Bearing DE Type Deep Groove Ball 53. DE Bearing Qty. 1 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 1 57. Insulated Bearing none 1 58. Lubrication Type Polyrex EM 1 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure none 67. Cause of Failure none | | | . , | SS |
| 51. Bearing DE Size 6309 2Z P14 52. Bearing DE Type Deep Groove Ball 53. DE Bearing Qty. 1 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 57. Insulated Bearing none 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure none 67. Cause of Failure none | M | | · | |
| 52. Bearing DE Type Deep Groove Ball 53. DE Bearing Qty. 1 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 1 57. Insulated Bearing none 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 60. Bearing Retainers (Y) Yes P79 P86 (N) No P86 62. DE Seal (Y) Yes P86 P8 | | | | |
| 53. DE Bearing Qty. 1 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 57. Insulated Bearing none 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure none 67. Cause of Failure None | | | | |
| 54. Bearing ODE Size 6309 2Z P43 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 57. Insulated Bearing none 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure none 67. Cause of Failure none | | | | |
| 55. Bearing ODE Type Deep Groove Ball 56. ODE Bearing Qty. 1 57. Insulated Bearing none 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure none 67. Cause of Failure none | | | • | |
| 56. ODE Bearing Qty. 1 57. Insulated Bearing none 58. Lubrication Type Polyrex EM ● 59. Grease Condition (P) Pass ● 60. Bearing Retainers (Y) Yes P79 ● 61. Shaft Grounding Device (N) No ● 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 ● 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure none 67. Cause of Failure none | | | | |
| 57. Insulated Bearing none 58. Lubrication Type Polyrex EM 59. Grease Condition (P) Pass 60. Bearing Retainers (Y) Yes P79 61. Shaft Grounding Device (N) No 62. DE Seal (Y) Yes P86 63. DE Seal Type/Size 80x45x10 64. ODE Seal (Y) Yes P96 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure 67. Cause of Failure None | | | | |
| 58. Lubrication Type 59. Grease Condition 60. Bearing Retainers 61. Shaft Grounding Device 62. DE Seal 63. DE Seal Type/Size 64. ODE Seal 65. ODE Seal Type/Size 66. Component Failure 66. Component Failure 67. Cause of Failure None | | | • • | |
| 59. Grease Condition 60. Bearing Retainers 61. Shaft Grounding Device 62. DE Seal 63. DE Seal Type/Size 64. ODE Seal 65. ODE Seal Type/Size 66. ODE Seal Type/Size 67. Cause of Failure 68. Component Failure 69. Cause of Failure 60. Cause of Failure 60. Cause of Failure 60. Cause of Failure | | | • | |
| 60. Bearing Retainers 61. Shaft Grounding Device 62. DE Seal 63. DE Seal Type/Size 64. ODE Seal 65. ODE Seal Type/Size 66. Component Failure 67. Cause of Failure None | | | | |
| 61. Shaft Grounding Device 62. DE Seal 63. DE Seal Type/Size 64. ODE Seal 65. ODE Seal Type/Size 66. Component Failure 67. Cause of Failure None | | | . , | |
| 62. DE Seal 63. DE Seal Type/Size 64. ODE Seal 65. ODE Seal Type/Size 66. Component Failure 67. Cause of Failure None | | | | |
| 63. DE Seal Type/Size 64. ODE Seal 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure 67. Cause of Failure None | | | | |
| 64. ODE Seal 65. ODE Seal Type/Size 80x45x10 Root Cause of Failure 66. Component Failure 67. Cause of Failure None | | | . , | |
| 65. ODE Seal Type/Size Root Cause of Failure 66. Component Failure 67. Cause of Failure None | | | | |
| Root Cause of Failure 66. Component Failure 67. Cause of Failure None | | | · , | |
| 66. Component Failure 67. Cause of Failure None | - | | | U |
| 67. Cause of Failure None | R | | | |
| None | | | | 16 |
| | | 67. | | |
| | | 68 | | |

69. Service Technician David Maclin

| | Jan M | | |
|-------------|--------------------------------------|----------|------|
| Mach | ine Fit Inspection Report | | O |
| 7 0. | Shaft Run Out | (P) Pass | |
| - | .001 | | |
| 71. | Initial Shaft Run Out | 0.001 " | |
| 72. | Final Shaft Run Out | | |
| 3 . | DE Bearing Shaft Fit | (P) Pass | P40 |
| 74. | DE Initial Shaft Bearing Fit Size 1 | 1.7718 " | |
| 75. | DE Initial Shaft Bearing Fit Size 2 | 1.772 " | |
| 76. | DE Initial Shaft Bearing Fit Size 3 | 1.7719 " | |
| 77. | DE Finial Shaft Bearing Fit Size 1 | | |
| 78. | DE Finial Shaft Bearing Fit Size 2 | | |
| 79. | DE Finial Shaft Bearing Fit Size 3 | | |
| 8 0. | ODE Bearing Shaft Fit | (P) Pass | P92 |
| 81. | ODE Initial Shaft Bearing Fit Size 1 | 1.7722 " | |
| 82. | ODE Initial Shaft Bearing Fit Size 2 | 1.772 " | |
| 83. | ODE Initial Shaft Bearing Fit Size 3 | 1.7721 " | |
| 84. | ODE Finial Shaft Bearing Fit Size 1 | | |
| 85. | ODE Finial Shaft Bearing Fit Size 2 | | |
| 86. | ODE Finial Shaft Bearing Fit Size 3 | | |
| 87. | DE Air Seal Shaft Fit | | |
| 88. | DE Initial Air Seal Shaft Size | | |
| 89. | DE Final Air Seal Shaft Size | | |
| 90. | ODE Air Seal Shaft Fit | | |
| 91. | ODE Initial Air Seal Shaft Size | | |
| 92. | ODE Final Air Seal Shaft Size | | |
| 93. | DE Endbell Fit | (F) Fail | P129 |
| | DE Initial Endbell Fit Size 1 | 3.9355 " | |

102. Initial Endbell Air Seal Fit Size

103. Finial Endbell Air Seal Fit Size

104. ODE Endbell Fit (P) Pass P145

3.9370 3.9371 3.9370

105. ODE Endbell Fit Insulated (NA) Not Applicable

106. ODE Endbell Air Seal Fit (NA) Not Applicable

107. ODE Initial Endbell Seal Fit Size "

108. ODE Finial Endbell Seal Fit Size

3.9358 "

3.936 "

(NA) Not Applicable

(NA) Not Applicable

95. DE Initial Endbell Fit Size 2

96. DE Initial Endbell Fit Size 3

97. DE Final Endbell Fit Size 1
98. DE Finial Endbell Fit Size 2
99. DE Final Endbell Fit Size 3
100. DE Endbell Fit Insulated

101. DE Endbell Air Seal Fit

109. Foot Flatness (NA) Not Applicable 110. Foot Condition (NA) Not Applicable 111. Flange Condition P152 (P) Pass 112. Service Technician **David Maclin Balancing Report** 113. Balance Type 114. Balance Operating Speed 115. Start Left End 116. Start Right End 117. Balancing Specification 118. Finish Left End 119. Finish Right End 120. Service Technician **Assembly and Final Test** 20000 Mohm 121. Meggar Testing Reading 122. Surge Test (P) Pass 123. Hi-Pot Ua 124. Winding Resistance 1-2 125. Winding Resistance 2-3 126. Winding Resistance 1-3 127. Test Run Voltage Phase A 460 Volts P54 128. Test Run Amps A **7.5 Amps** 129. Test Run Voltage Phase B 460 Volts 130. Test Run Amps B **7.4 Amps** 131. Test Run Voltage Phase C 460 Volts 132. Test Run Amps C **7.1 Amps** 133. DE Horizontal Vibration Reading 0.02 In/Sec 134. DE Vertical Vibration Reading 0.03 In/Sec 135. DE Axial Vibration Reading 0.03 In/Sec 136. ODE Horizontal Vibration Reading 0.01 In/Sec 137. ODE Vertical Vibration Reading 0.02 In/Sec 0.03 In/Sec 138. ODE Axial Vibration Reading 139. Ambient Temp at start of Test Run 140. Temp at 5 minutes 141. Temp at 10 minutes 142. Temp at 15 minutes 143. Temp at 20 minutes 144. Temp at 25 minutes 145. Temp at 30 minutes 146. Temp at 35 minutes 147. Temp at 40 minutes

Hi-Speed Industrial Service disclaims all warranties, both express and implied, relating to the information, reports, opinions and analysis disclosed to the Customer by Hi-Speed. Hi-Speed shall not be liable for any errors or omissions, or any losses, injury or damages arising from the use of such information, reports, opinions and analysis by the Customer.

148. Temp at 45 minutes149. Temp at 50 minutes

- 150. Temp at 55 minutes
- 151. Temp at 60 minutes
- 152. Motor Paint

153. Service Technician

Trevor Hall


























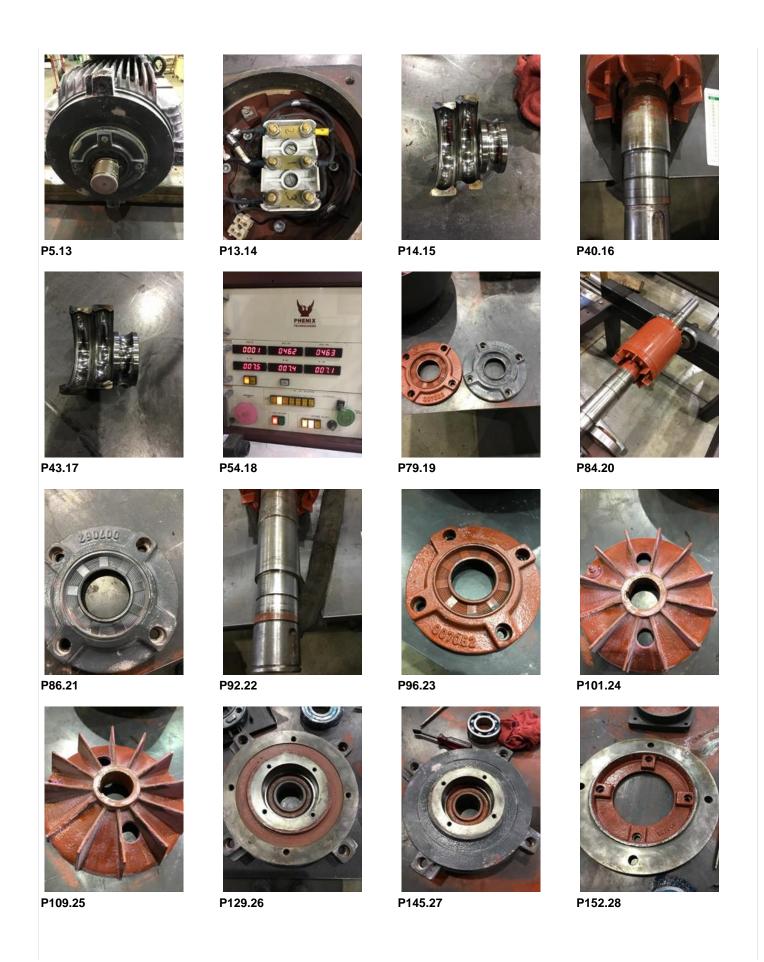

Hi-Speed Industrial Service disclaims all warranties, both express and implied, relating to the information, reports, opinions and analysis disclosed to the Customer by Hi-Speed. Hi-Speed shall not be liable for any errors or omissions, or any losses, injury or damages arising from the use of such information, reports, opinions and analysis by the Customer.



P152.29



STANDARD TERMS AND CONDITIONS FOR PURCHASE OF GOOD AND/OR SERVICES

- 1. APPLICABILITY. The sale of any and all goods and/or services by Mock, Inc. d/b/a Hi-Speed Industrial Service ("Hi-Speed") shall be specifically conditioned upon and subject to the following terms and conditions which are incorporated by reference into any contracts and purchase orders with Hi-Speed, and which shall form and become a part of any agreement related thereto. Buyer's acceptance of any offer or quotation made by Hi-Speed for sale of any goods or services is expressly made subject to the terms and conditions set forth herein and to be so effective, Buyer need not sign or approve these Terms and Conditions to be bound hereunder provided a copy of same is provided to Buyer through any means. None of the terms and conditions contained herein may be added to, expanded, changed, modified, superseded or otherwise altered except as revised in writing and duly executed by Hi-Speed, and all orders received by Hi-Speed shall be governed only by the terms and conditions contained herein, notwithstanding any terms, conditions or provisions of any purchase order, release order, authorization or any other form issued by the Buyer. Hi-Speed hereby objects to any additional, modified, changed, deleted, altered or other terms and conditions not contained herein and notifies Buyer that any such terms or provisions are expressly rejected by Hi-Speed.
- 2. PRICE. All quoted prices shall remain firm and binding for a period of thirty (30) days from the date of quotation or for the period specifically stated in the quotation. The price for any and all goods and/or services ordered or approved by Buyer after thirty (30) days from the date of any quotation are subject to any increase in price that may occur after the expiration of thirty (30) days from the issuance of the quotation and the date the Buyer releases any shipment.
- 3. SCOPE OF GOODS AND/OR SERVICES. The goods and/or services provided by Hi-Speed pursuant to any quotation shall be limited exclusively to those goods and/or services expressly identified therein. Hi-Speed does not assume any responsibility and/or liability for the failure to provide any other goods and/or services not identified in any quotation. Modifications, additions or deletions to or from the scope referenced in any quotation shall only bee effective if evidenced in writing and signed by Hi-Speed. The sale of any of all goods and/or services affected by such modification, addition or deletion shall be subject to these same Standard Terms and Conditions whether or not referenced therein.
- 4. <u>BILLING AND PAYMENT TERMS.</u> Hi-Speed shall invoice Buyer for all goods and/or services as same are rendered at the address listed on the quotation. Payments for all goods and/or services shall be due thirty (30) days from the date of the current invoice or as otherwise set forth in the quotation. Late payments are subject to a late fee of 5% of the total invoice amount. Recurring late payments may lead to a deposit requirement on future services or sale of goods. Buyer shall be liable to Hi-Speed for any and all fees and expenses incurred by Hi-Speed to collect any invoices or to enforce these Standard Terms and Conditions, including but not limited to, attorney's fees.
- 5. <u>DELIVERY OF GOODS AND/OR SERVICES.</u> Unless otherwise identified in the quotation, all shipments are F.O.B. Hi-Speed's warehouse and the title to and all risk of loss with respect to any goods shipped shall pass to Buyer when such goods are delivered to the carrier at Hi-Speed's warehouse. Hi-Speed will use its best efforts to affect delivery by the date or dates specified in the quotation. However, Hi-Speed shall not be liable for delay in or failure to make shipment, or to perform services, by any identified date for any reason whatsoever, including but not limited to, causes beyond its reasonable control, such as strikes, fires, floods, epidemics, quarantines, restrictions, severe weather, embargos, acts of God, or public enemy, war, riot, delays in transportation or the inability to obtain necessary labor, materials or manufacturing facilities.
- **DELIVERY SITE AND TIME FOR PERFORMANCE.** Hi-Speed and Buver agree that time is of the essence for the purchase order and that Buyer shall fully cooperate with Hi-Speed in order to allow Hi-Speed full access to prosecute its work diligently and in an orderly manner. Buyer shall assist Hi-Speed in every way possible to avoid delaying, disrupting or interfering with the progress of Hi-Speed's work at the project site. In the event Hi-Speed's work is delayed, hindered, suspended, disrupted, re-sequenced or interfered with or rendered less efficient or more costly or adversely affected in any way as a result of acts or omissions of Buyer or other contractors or employees of Buyer or by any other reason beyond Hi-Speed's control and without the fault of Hi-Speed, then, in such event, Buyer shall be liable to Hi-Speed for any damages, additional costs, expenses, labor, materials, man hours, acceleration costs, overtime, additional jobsite overhead, extended home office overhead, and any and all other direct and indirect expenses of whatsoever nature or kind, caused in whole or in part, as a result of any of the above-referenced occurrences. Hi-Speed's project records will be the basis for computing the additional costs and damages of Hi-Speed's labor, materials, expenses and overhead related to such changes. BUYER WARRANTS THAT THE SITE FOR DELIVERY OR INSTALLATION OF ANY GOODS AND/OR FOR THE PERFORMANCE OF ANY SERVICES SHALL BE READY AND ADEQUATE FOR HI-SPEED'S DELIVERY OF GOODS AND/OR PERFORMANCE OF SERVICES AND THAT HI-SPEED SHALL HAVE FULL ACCESS THERETO, FREE OF ALL OBSTRUCTIONS. BUYER SHALL ASSUME ALL EXTRA COSTS ASSOCIATED WITH HI-SPEED'S INABILITY TO INSTALL ANY GOODS OR PERFORM ANY SERVICES AS A RESULT OF BUYER'S FAILURE TO COMPLY WITH THIS PROVISION. HI-SPEED MAY NOT INSPECT THE SITE PRIOR TO DELIVERY AND/OR INSTALLATION OF GOODS AND/OR PERFORMANCE OF SERVICES AND MAKES NO WARRANTY AS TO THE SUFFICIENCY OF THE SITE FOR THE DELIVERY AND/OR INSTALLATION OF GOODS AND/OR THE PERFORMANCE OF SERVICES AT SUCH SITE.
- 7. INSPECTION/ACCEPTANCE. All goods and services ordered pursuant to any quotation shall be subject to inspection by Buyer after delivery or performance to determine conformity with the quotation and/or purchase order and Hi-Speed's advertised or published specifications. Buyer shall have a period of thirty (30) days from shipment of goods at the delivery destination specified in the quotation within which to inspect the goods for conformity with the quotation, order and/or Hi-Speed's advertised and published specifications and to provide Hi-Speed with written notice of any discrepancy or rejection. Buyer shall have a period of thirty (30) days following completion of any services within which to inspect the services for conformity with the quotation, purchase order and/or Hi-Speed's advertised and published specifications and to provide Hi-Speed with written notice of any discrepancy or rejection. If the goods delivered or services performed do not so conform, upon delivery of notice to Hi-Speed of any discrepancy, nonconformance or rejection, Hi-Speed shall have sixty (60) days to cure the alleged discrepancy and/or nonconformance. If Hi-Speed fails to cure in this time period, Buyer shall have the right to reject such goods or services. After the cure period, goods that have been delivered and rejected, in whole or in part, shall be returned to Hi-Speed. Buyer shall notify Hi-Speed and arrange for the return of the goods as required. Should such non-conforming services be rejected Hi-Speed shall, at its sole cost, re-perform the non-conforming services. Inspection or failure to inspect on any occasion shall not affect Buyer's rights under the warranty provisions herein.
- 8. WARRANTIES. Hi-Speed warrants that all goods shall conform in all material aspects to the goods identified in the quotation to Buyer and/or purchase order, and Hi-Speed makes to Buyer the manufacturer's express warranty for any goods sold to Buyer, which is offered by the manufacturer at the time of acceptance of any quotation by Buyer. This warranty is conditioned upon the installation, operation, and maintenance of the goods in accordance with the manufacturer's recommendations and/or standard industry practice and the goods at all times being operated or used under normal operating conditions for which they were designed. Hi-Speed, at its sole option, will repair or

replace any defective or non-conforming goods in accordance with the applicable manufacturer's warranty. Warranty for any defective or incorrect parts is limited to the repair or replacement of those parts. Hi-Speed warrants that all services will conform in all material respects to the description of services identified in the quotation and will be performed in a good and workmanlike manner in accordance with industry practices and standards. Should the services be reasonably rejected or not conform with the foregoing warranties, Hi-Speed shall, at its sole cost, re-perform the defective or nonconforming services. Notwithstanding the foregoing, these warranties do not extend to goods or services to the extent that such goods have been subject to misuse, neglect or abuse not caused by Hi-Speed or have been used in violation of the approved written instructions furnished to Buyer. THE FOREGOING REPRESENTS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY HI-SPEED WITH RESPECT TO ALL GOODS SOLD AND IS IN LIEU OF ALL OTHER WARRANTIES EITHER EXPRESS OR IMPLIED. HI-SPEED EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICLAR USE OR PURPOSE. BUYER WAIVES ANY CLAIM THAT THESE EXCLUSIONS OR LIMITATIONS DEPRIVE IT OF AN ADEQUATE REMEDY AT EQUITY OR LAW OR CAUSE THIS AGREEMENT TO FAIL IN ITS ESSENTIAL PURPOSE. BUYER SHALL BE ENTITLED TO NO OTHER REMEDY OTHER THAN AS SET FORTH HEREIN, REGARDLESS OF THE CLAIM OR CAUSE OF ACTION, WHETHER BASED IN CONTRACT, TORT, NEGLIGENCE, GOODS LIABILITY, STRICT LIABILITY OR OTHERWISE.

- 9. <u>LIMITATION OF DAMAGES.</u> HI-SPEED SHALL HAVE NO LIABILITY TO BUYER WITH RESPECT TO THE SALE OR DELIVERY OF ANY GOODS OR THE REPAIR THEREOF OR WITH RESPECT TO THE SALE OR PERFORMANCE OF ANY SERVICES, FOR LOST PROFITS, SPECIAL, CONSEQUENTIAL, EXEMPLARY, PUNITIVE OR INCIDENTAL DAMAGES OF ANY KIND OR NATURE WHETHER ARISING IN CONTRACT, TORT, GOODS LIABILITY OR OTHERWISE, EVEN IF HI-SPEED WAS ADVISED OF THE POSSIBILITY OF SUCH LOSS OR DAMAGES. HI-SPEED SHALL NOT BE LIABLE FOR ANY DAMAGES OR DELAYS CAUSED BY ANY FAILURE TO MAKE ANY DELIVERY OF GOODS BY ANY EXPECTED TIME OR DATE OR THE FAILURE TO PROVIDE OR COMPLETE ANY SERVICES BY ANY EXPECTED DATE OR TIME. IN NO EVENT SHALL HI-SPEED BE LIABLE TO BUYER FOR ANY DAMAGES WHATSOEVER IN EXCESS OF THE TOTAL PRICE PAID FOR ALL GOODS AND/OR SERVICES HEREUNDER OR REFERENCED IN ANY QUOTATION OR THE PURCHASE ORDER.
- 10. <u>SEVERABILITY.</u> The partial or complete invalidity of any provision of these Standard Terms and Conditions shall not affect the enforceability of the remainder of these Standard Terms and Conditions. If any provision is found to be invalid or unenforceable, that portion shall be modified to make it enforceable or shall be stricken and the remainder of these Standard Terms and Conditions shall enforced.
- 11. **GOVERNING LAW AND JURISDICTION.** Any controversy arising out of any quotation, the purchase order, the goods sold or delivered, repair or replacement thereof, or any services provided pursuant to any quotation or any purchase order, or these Standard Terms and Conditions shall be governed by the laws of the state of Tennessee without regard to any choice of law provisions and any cause of action related in any manner thereto shall be brought only in the state or federal courts of Shelby County, Tennessee.
- 12. ABANDONED EQUIPMENT. Hi-Speed requires that Buyer promptly pick up or provide shipment instructions for Buyer equipment or other Buyer property in Hi-Speed's possession. If equipment or other Buyer property is left with Hi-Speed and not picked up within six (6) months after Hi-Speed's final action related to the applicable property (e.g. evaluation, teardown, estimate, completion of services), Hi-Speed will consider such property abandoned and may dispose of it in accordance with applicable law. Buyer agrees to hold Hi-Speed harmless for any damage or claim for such abandoned property and acknowledges that Hi-Speed may discard or recycle it at Hi-Speed's sole and absolute discretion. Specifically, Hi-Speed may sell Buyer's abandoned property at a private or public sale and retain the proceeds to offset Hi-Speed's storage, inspection and servicing costs. For the avoidance of doubt, Hi-Speed reserves its statutory and other lawful liens for unpaid charges related to abandoned property.
- 13. FORCE MAJEURE. Neither party shall be responsible for any delay or failure in performance of any party of the quotation, purchase order or these Standard Terms and Conditions to the extent that such delays or failures are caused by fire, flood, earth quake, explosion, war, embargo, government requirement, civil or military authority, acts of God, or any other circumstances beyond its reasonable control and not involving any fault or negligence on the party affected ("Condition"). If any such Condition occurs, the party delayed or unable to perform shall promptly give written notice to the other party and, if such Condition remains at the end of thirty (30) days, the party affected by the other party's delay and inability to perform may elect to (i) terminate such order or part thereof, or (ii) suspend the order for the duration of the Condition, if the Buyer is the suspending party, buy elsewhere comparable material to be sold under the order and apply to any commitment the purchase price of such purchase, and resume performance of the order once the Condition ceases, with an option in the affected party to extend the period of this order up to the length of the time the Condition endures.
- 14. <u>NONWAIVER.</u> No course of dealing or failure of either party to strictly enforce any term, right, or condition of these Standard Terms and Conditions will be construed as a waiver of such term, right or condition. Any waiver by Hi-Speed will only be in writing and will waive no succeeding breach of a term, right or condition.
- 15. **ASSIGNMENT.** The rights and obligations of the parties shall neither be assigned nor delegated without the prior written consent of the other party. However, any party may assign or delegate its respective rights and obligations, in whole or in part, (i) to any subsidiary, (ii) pursuant to other financing, merger or reorganization or (iii) pursuant to any sale or transfer of substantially all of the assets of the assigning party. These Standard Terms and Conditions shall bind the heirs, successors and assigns of the parties hereto.
- 16. NO INDIVIDUAL LIABILITY. Notwithstanding any other agreement to the contrary, the Buyer agrees that in no event will the Buyer hold and HI-Speed owner, director, officer or employee personally liable for unintentional tortious conduct or conduct that constitutes the breach of any contract between HI-Speed and the Buyer, even if the HI-Speed owner, director, officer or employee is or could be construed to be a party to such contract.