

Job Information

Job #	: 141580			Date:	January 28, 2020
Priority	: —	Authorized OT:	No	Authorized by:	
Custom	er Information				
Name	: KTG			Motor#:	
Name P	late Information				
Manufact	turer: PEV	Enclosure	:	Open Drop Proof (ODP)	
Sei	rial#: 00001447	Model	#:	()	
Service Fa	actor:	Frame	e:		
Horsepower	r/kW:	Rated RPM	/ 1:		
					-
Armature	Volts	Fields	lds	Volts	
	Amps			Amps	

Winding Inspection


Identify winding disassembly & winding assembly.

Armature diagram



Flds diagram







WEST TENNESSEE 7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301



6812 Lindsey Rd. Little Rock, AR 72206 Phone 501-375-9178 Fax 501-375-4254



Winding Inspection (Continued)

DC Drop Test			
Megohmmeter reading to ground @ \$	500 V DC A	srmature Sh	unt
	Ir	nterpole Se	ries
Nameplate field volts:	Nameplate amps:	Num coils:	
Resistance = Field votes:	/ Field amps:	= 0	
Total field resistance:	@	F/C correct to 25 degrees C	
Test tolerances: For a DO	C drop Test +/- 5% from averag	ge; for an AC drop test +/- 10% from ave	erage.
Applied Voltage 1:	DC/# of Coils 1:	= Target Voltage/coil 1:	0
Applied Voltage 2:	DC/# of Coils 2:	= Target Voltage/coil 2:	0

WEST TENNESSEE

7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301



DC Drop Test (Continued)

Match mark all coils clockwise beginning at the leads.

Voltage Applied				
Shunt DC Voltage:	Shunt AC	Shunt AC Voltage:		
	Voltage Measured			
Coil #	DC	AC		
Coil 1				
Coil 2				
Coil 3				
Coil 4				
Coil 5				
Coil 6				
Coil 7				
Coil 8				
AVERAGE	0	0		
+5%	0	0		
-5%	0	0		

VEST TENNESSE 7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301



DC Drop Test (Continued)

Match mark all coils clockwise beginning at the leads.

Voltage Applied				
A. Interpoles DC Voltage:	A. Interpoles AC Voltage:			
Voltage Measured				
Coil #	DC	AC		
Coil 1				
Coil 2				
Coil 3				
Coil 4				
Coil 5				
Coil 6				
Coil 7				
Coil 8				
AVERAGE	0	0		
+5%	0	0		
-5%	0	0		

VEST TENNESSE 7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301



DC Drop Test (Continued)

Match mark all coils clockwise beginning at the leads.

Voltage Applied				
B. Interpoles DC Voltage:	B. Interpoles AC Voltage:			
Vo	Itage Measured			
Coil #	DC	AC		
Coil 1	4.5			
Coil 2	4.5			
Coil 3	4.5			
Coil 4	4.5			
Coil 5	4.5			
Coil 6	4.5			
Coil 7	1.05			
Coil 8	1.05			
AVERAGE	0	0		
+5%	0	0		
-5%	0	0		

VEST TENNESSE 7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301



Conclusion

Service Tech name:

Kelly Felts

Service Tech signature:

Kelly Jetto

WEST TENNESSEE 7030 Ryburn Drive

7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301



Commutator Data

EASA The Electro-Mechanical Authority	Front Total copper se V-ring Ext. Length brus		Rear V-ring Ext.
Max Comm Dia. Comm Dia. Comm Dia. Comm Dia. Uia. V-ring Bore Dia. Uia.			Riser Dia. Dia. Over V-ring
No. Copper segments:	Wire size:	Indica	te Riser Type
Mica segment thickness:	Wires/riser slot:	Double slot	Single slot solid
Equalizer size:	Equalizer/riser slot:	solid riser	riser
Equalizer seq. on comm.:		SH	
Commutator Type 🗌 Nut v-	ring 🔲 Bolt v-ring 🔲 Gla	ssband	川恒
Riveted*	Molded*	====	
Other*		-AI	
Shaft Diameter Keyway alignment with center line	of: 🗌 Mica 🗌 Copper	segment	HHAN'
Keyway size:		Double inserted	Single inserted
*If molded, riveted or other micrometer m corresponding to the commutator bore dia		riser	riser thickness:
	AL ARKANSAS		
	k, AR 72206 1-375-9178		



MILLINGTON, TN LITTLE ROCK, AR

DC Machine Data Sheet



				The Electro+Mechanical Authomy
Armature Coil Data				Winding Type
Slots: Turns per coi	il: Coil per slot:			Shunt
Wire size: Wires in mult	:.: Wire type:	Wire weig	ht: Lbs.	Series
Bars: Slot span 1 to	o: Comm span 1 t	0:		Compound
No. of equalizers: Span	1 to: Wire size	:		Interpoles: Yes
Knuckle: Standard Dou	uble Co	ompensating Windin	ıg	
Wound: 🗌 Flat 🛛 Edg	ge Wire size:	Turns per slo	ot:	Compensating or Pole Face Winding
Coil: Left hand Rig	ht hand			Permanent Magnet
	5 6 7 8 CORE LENGTH FINGER PLATES CORE DIA.	-114	Slot Dimensions A T B C L A A B	Insul. class: Temp. Rise: Duty: Wave Winding Leads from slot 1 to bar: Leads from Slot to bar:
11 12 13 14	15 16 17 18	19	С	
Field Coil Dimensions TYPE A B C Shunt Series Interpoles	C D E W	Manufacturer's	Part Numbers	Lap Winding Leads from slot 1 to bar: Leads from Slot to bar:
7030 Ryburn Drive 6812 L Millington, TN 38053 Little I Phone 901-873-5300 Phone	TRAL ARKANSAS Lindsey Rd. Rock, AR 72206 501-375-9178 Nu-375-1254			




MILLINGTON, TN LITTLE ROCK, AR

DC Machine Data Sheet (Continued)



Field Coil Winding Data

Туре	No. Coils	No. Cir.	Turns Per Coil —	Mult.	Wire Size & Type	Lbs. Per Coil	25 Ohm Per Coil DC
Shunt							
Series							
Interpoles							
Slot and bar lin		050005					

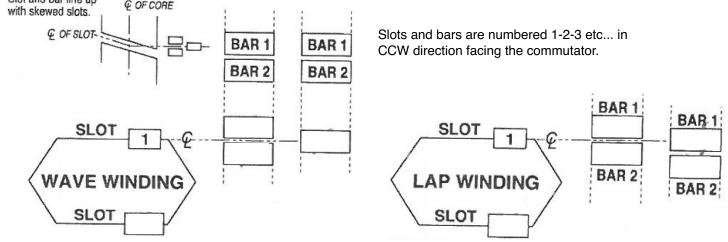


Remarks

WEST TENNESSEE 7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301



As-Received Connection Form--2-,4-,and 6-pole DC Machines

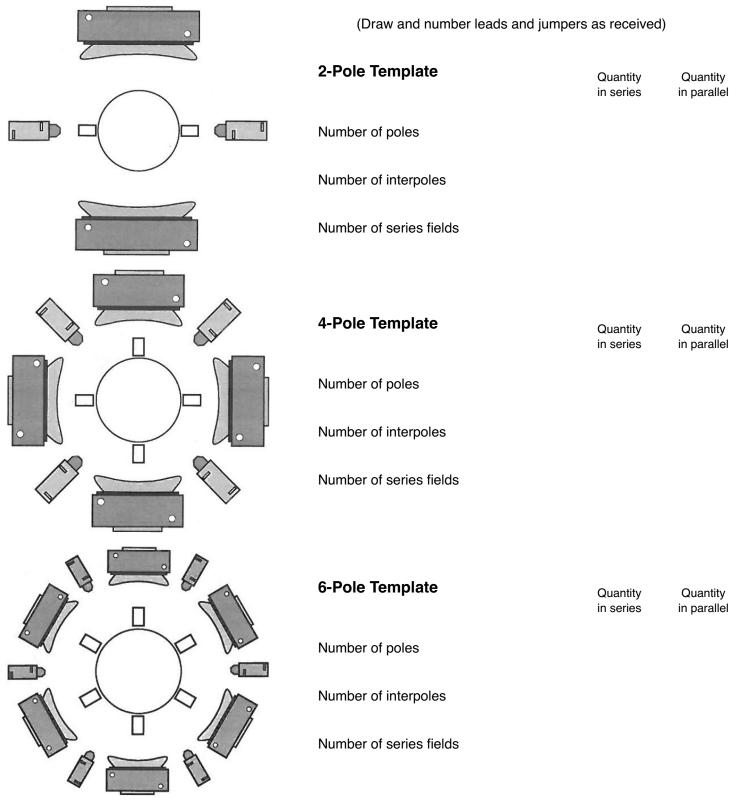

WEST TENNESSEE 7030 Ryburn Drive Millington, TN 38053 Phone 901-873-5300 Fax 901-873-5301