

# EVERY DAY SINCE 1946

**Motor Shop Repairs** 

## Job Number 97964

Prepared for Peco Foods

596 Ramsey St Batesville AR 72501

## Table of Contents

AC Recondition Repair Report



Hi-Speed Industrial Service 7030 Ryburn Dr Millington, Tn 38053 901-873-5300

WORLD WIDE

FolderID: 97964

FormID: 10202856

### **AC Recondition Repair Report**

#### **Peco Foods**


596 Ramsey St Batesville, AR 72501

Priorities Found: 🛑 3 - High	🔵 14 - Good	
General		
1. Job Number		97964
2. Report Date		3/11/2021
3. Customer		PECO FOODS

Name Plate Information



















5.	Model	PEWWE40-36-324JM
6.	Serial Number	1003413 V RCJ
7.	Horsepower	40
8.	KW	KW
9.	Volts	460
10.	Amps	46.1
11.	RPM	3545
12.	Frame	324JM
13.	Enclosure	TEFC
14.	Cycles	60
15.	Phase	3
16.	Service Factor	1.15
17.	Motor Mount Position	
Initial	Inspection	


#### 18. Number of Leads



19	. Lead Length	13 Inches
20	. Lead Size	8
21	. Lead Condition	(P) Pass
22	. Lead Markings	1-12
23	. Lug Size, Condition, and Type	
24	. Winding RTD's	(NA) Not Applicable
25	. Winding Rtd's Condition	(NA) Not Applicable
26	. Shaft Run Out	
27	. Does Shaft Turn Freely	
28	. Does Shaft Have Visible Damage	no
29	. Bearing Rtd's	(NA) Not Applicable
30	. Bearing Rtd's Condition	(NA) Not Applicable
31	. Contamination	
32	. Frame Condition	(P) Pass
33	. Fan Condition	(P) Pass



34. Broken or missing components
Initial Electric Test
35. Resistance to Ground
36. Winding Resistance 1-2
37. Winding Resistance 2-3
38. Winding Resistance 1-3

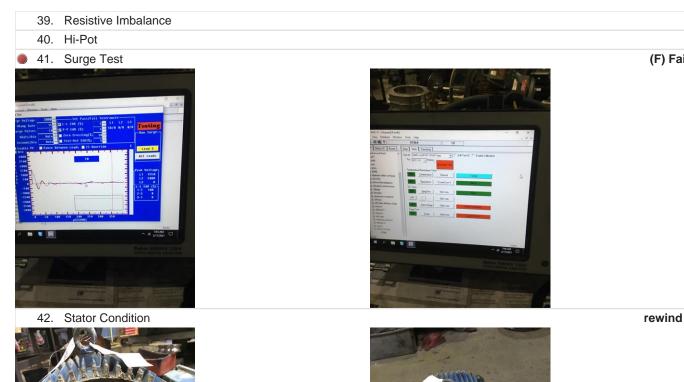



43. Failure Location **Initial Rotor Inspection** 

44. Rotor Type



45. Air Gap <10% Variation

46. Number of Rotor Bars

Hi-Speed Industrial Service disclaims all warranties, both express and implied, relating to the information, reports, opinions and analysis disclosed to the Customer by Hi-Speed. Hi-Speed shall not be liable for any errors or omissions, or any losses, injury or damages arising from the use of such information, reports, opinions and analysis by the Customer.

cast aluminum

(F) Fail



47. Number of Broken Rotor Bars	
48. Growler Test	
49. Rotor Condition	(P) Pass
Mechanical Inspection	
50. Bearing Manufacture	SKF
51. Bearing DE Size	6312 C3



52. Bearing DE Type



53. DE Bearing Qty.54. Bearing ODE Size



ball


6311 C3

1

#### 55. Bearing ODE Type



5	6. ODE Bearing Qty.	1
5	7. Insulated Bearing	no
5	8. Lubrication Type	grease





(Y) Yes (NA) Not Applicable (NA) Not Applicable

(NA) Not Applicable



**Bearing Retainers** 

Shaft Grounding Device

60. 61.

63. DE Seal Type/Size

64. ODE Seal

(NA) Not Applicable

0/				
No	TATTA ALSO			
19				
		15		
april 1				
1.1				

1			
-	74. DE Initial Shaft Bear	ing Fit Size 1	2.3623 "
-	75. DE Initial Shaft Bear	ing Fit Size 2	2.3623 "
-	76. DE Initial Shaft Bear	ing Fit Size 3	2.3623 "
-	77. DE Finial Shaft Bear	ring Fit Size 1	
-	78. DE Finial Shaft Bear	ring Fit Size 2	
7	79. DE Finial Shaft Bear	ring Fit Size 3	
•	30. ODE Bearing Shaft F	Fit	(P) Pass



65. ODE Seal Type/Size **Root Cause of Failure** 66. Component Failure 67. Cause of Failure 68. Comments

69. Service Technician **Machine Fit Inspection Report** 

70. Shaft Run Out 71. Initial Shaft Run Out 72. Final Shaft Run Out 73. DE Bearing Shaft Fit

1 THE

81. ODE Initial Shaft Bearing Fit Size 1	2.166 "
82. ODE Initial Shaft Bearing Fit Size 2	2.166 "
83. ODE Initial Shaft Bearing Fit Size 3	2.166 "
84. ODE Finial Shaft Bearing Fit Size 1	

Hi-Speed Industrial Service disclaims all warranties, both express and implied, relating to the information, reports, opinions and analysis disclosed to the Customer by Hi-Speed. Hi-Speed shall not be liable for any errors or omissions, or any losses, injury or damages arising from the use of such information, reports, opinions and analysis by the Customer.

(P) Pass

- 85. ODE Finial Shaft Bearing Fit Size 2
- 86. ODE Finial Shaft Bearing Fit Size 3
- 87. DE Air Seal Shaft Fit
- 88. DE Initial Air Seal Shaft Size
- 89. DE Final Air Seal Shaft Size
- 90. ODE Air Seal Shaft Fit
- 91. ODE Initial Air Seal Shaft Size
- 92. ODE Final Air Seal Shaft Size
- 93. DE Endbell Fit



11055013		
94.	DE Initial Endbell Fit Size 1	5.1201 "
95.	DE Initial Endbell Fit Size 2	5.1201 "
96.	DE Initial Endbell Fit Size 3	5.1201 "
97.	DE Final Endbell Fit Size 1	5.1185 "
98.	DE Finial Endbell Fit Size 2	5.1185 "
99.	DE Final Endbell Fit Size 3	5.1185 "
100.	DE Endbell Fit Insulated	
101.	DE Endbell Air Seal Fit	
102.	Initial Endbell Air Seal Fit Size	
103.	Finial Endbell Air Seal Fit Size	
104.	ODE Endbell Fit	(F) Fail



105. ODE Initial Endbell Fit Size 1	4.7292 "
106. ODE Initial Endbell Fit Size 2	4.7292 "

(F) Fail

107. ODE Initial Endbell Fit Size 3	4.7292 "
108. ODE Final Endbell Fit Size 1	4.725 "
109. ODE Final Endbell Fit Size 2	4.725 "
110. ODE Final Endbell Fit Size 3	4.725 "
111. ODE Endbell Fit Insulated	
112. ODE Endbell Air Seal Fit	
113. ODE Initial Endbell Seal Fit Size	
114. ODE Finial Endbell Seal Fit Size	
115. Foot Flatness	(P) Pass
116. Foot Condition	(P) Pass
117. Flange Condition	(P) Pass
118. Service Technician	RW

RW

#### **Balancing Report**


119. Balance Type

dynamic



120. Balance Operating Speed
121. Start Left End
122. Start Right End
123. Balancing Specification
124. Finish Left End
125. Finish Right End
126. Service Technician
Assembly and Final Test

#### 127. Meggar Testing Reading



128. Surge Test         Waund&surge         129. Hi-Pot       Ua         130. Winding Resistance 1-2         131. Winding Resistance 2-3         132. Winding Resistance 1-3         133. Test Run Voltage Phase A         134. Test Run Amps A         135. Test Run Voltage Phase B         136. Test Run Voltage Phase C         137. Test Run Mups C         138. Test Run Amps C         139. DE Horizontal Vibration Reading       0.0124 In/Sec         140. DE Vertical Vibration Reading       0.0276 In/Sec         141. DE Axial Vibration Reading       0.0276 In/Sec         142. ODE Horizontal Vibration Reading       0.0276 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         145. Andian Temp at start of Test Run       0.0255 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         145. Ambient Temp at start of Test Run       146. Temp at 10 minutes         147. Temp at 10 minutes       147. Temp at 20 minutes         148. Temp at 20 minutes       151. Temp at 30 minutes         153. Temp at 30 minutes       151. Temp at 30 minutes         154. Temp at 30 minutes       155. Temp at 30 minutes         155. Temp at 30 minutes       155. Temp at 30 minutes         155. Temp at 30 minutes			
129. Hi-Pot       Ua         130. Winding Resistance 1-2       131. Winding Resistance 2-3         131. Winding Resistance 2-3       132. Winding Resistance 2-3         132. Winding Resistance 1-3       133. Test Run Voltage Phase A         133. Test Run Voltage Phase A       134. Test Run Amps A         135. Test Run Voltage Phase B       136. Test Run Voltage Phase C         138. Test Run Voltage Phase C       137. Test Run Voltage Phase C         139. DE Horizontal Vibration Reading       0.0124 In/Sec         140. DE Vertical Vibration Reading       0.0276 In/Sec         141. DE Axial Vibration Reading       0.0255 In/Sec         142. ODE Horizontal Vibration Reading       0.0265 In/Sec         143. ODE Vertical Vibration Reading       0.0255 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         145. Ambient Temp at start of Test Run       146. Temp at 20 minutes         146. Temp at 20 minutes       148. Temp at 20 minutes         147. Temp at 20 minutes       148. Temp at 20 minutes         150. Temp at 35 minutes       151. Temp at 30 minutes         152. Temp at 35 minutes       152. Temp at 35 minutes         153. Temp at 40 minutes	128.	Surge Test	
130. Winding Resistance 1-2         131. Winding Resistance 1-3         132. Winding Resistance 1-3         133. Test Run Voltage Phase A         134. Test Run Amps A         135. Test Run Voltage Phase B         136. Test Run Voltage Phase C         137. Test Run Voltage Phase C         138. Test Run Voltage Phase C         139. DE Horizontal Vibration Reading       0.0124 In/Sec         140. DE Vertical Vibration Reading       0.0276 In/Sec         141. DE Axial Vibration Reading       0.0276 In/Sec         142. ODE Horizontal Vibration Reading       0.0265 In/Sec         144. ODE Vertical Vibration Reading       0.0265 In/Sec         145. Ambient Temp at start of Test Run       0.0255 In/Sec         146. Temp at 10 minutes       147. Temp at 10 minutes         147. Temp at 10 minutes       148. Temp at 25 minutes         150. Temp at 20 minutes       151. Temp at 30 minutes         152. Temp at 30 minutes       152. Temp at 40 minutes         153. Temp at 40 minutes       153. Temp at 40 minutes         154. Temp at 40 minutes       155. Temp at 40 minutes         155. Temp at 40 minutes       155. Temp at 40 minutes         155. Temp at 40 minutes       155. Temp at 40 minutes		Wound&surge	
131. Winding Resistance 2-3         132. Winding Resistance 1-3         133. Test Run Voltage Phase A         134. Test Run Amps A         135. Test Run Voltage Phase B         136. Test Run Amps B         137. Test Run Voltage Phase C         138. Test Run Amps C         139. DE Horizontal Vibration Reading       0.0124 In/Sec         141. DE Axial Vibration Reading       0.0276 In/Sec         142. ODE Horizontal Vibration Reading       0.0276 In/Sec         143. ODE Vertical Vibration Reading       0.0255 In/Sec         144. ODE Avial Vibration Reading       0.0255 In/Sec         145. Ambient Temp at start of Test Run       0.0255 In/Sec         146. Temp at 5 minutes       1         147. Temp at 10 minutes       1         148. Temp at 20 minutes       1         150. Temp at 30 minutes       1         151. Temp at 30 minutes       1         152. Temp at 30 minutes       1         153. Temp at 40 minutes       1         154. Temp at 50 minutes       1         155. Temp at 55 minutes       1 </td <td>129.</td> <td>Hi-Pot</td> <td>Ua</td>	129.	Hi-Pot	Ua
132. Winding Resistance 1-3         133. Test Run Voltage Phase A         134. Test Run Amps A         135. Test Run Voltage Phase B         136. Test Run Amps B         137. Test Run Voltage Phase C         138. Test Run Amps C         139. DE Horizontal Vibration Reading       0.0124 In/Sec         140. DE Vertical Vibration Reading       0.0276 In/Sec         141. DE Axial Vibration Reading       0.0255 In/Sec         142. ODE Horizontal Vibration Reading       0.0285 In/Sec         144. DE Axial Vibration Reading       0.0255 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         145. Ambient Temp at start of Test Run       146. Temp at 10 minutes         146. Temp at 10 minutes       147. Temp at 10 minutes         147. Temp at 10 minutes       148. Temp at 20 minutes         150. Temp at 25 minutes       151. Temp at 30 minutes         152. Temp at 30 minutes       152. Temp at 35 minutes         153. Temp at 40 minutes       153. Temp at 50 minutes         154. Temp at 50 minutes       155. Temp at 55 minutes         155. Temp at 55 minutes       155. Temp at 55 minutes         155. Temp at 55 minutes       155. Temp at 55 minutes         155. Temp at 55 minutes <td>130.</td> <td>Winding Resistance 1-2</td> <td></td>	130.	Winding Resistance 1-2	
133. Test Run Voltage Phase A         134. Test Run Amps A         135. Test Run Voltage Phase B         136. Test Run Amps B         137. Test Run Voltage Phase C         138. Test Run Amps C         139. DE Horizontal Vibration Reading       0.0124 In/Sec         140. DE Vertical Vibration Reading       0.0276 In/Sec         141. DE Axial Vibration Reading       0.0276 In/Sec         142. ODE Horizontal Vibration Reading       0.0265 In/Sec         143. ODE Vertical Vibration Reading       0.0265 In/Sec         144. ODE Axial Vibration Reading       0.0265 In/Sec         145. Ambient Temp at start of Test Run       0.0255 In/Sec         146. Temp at 10 minutes       1147. Temp at 10 minutes         147. Temp at 10 minutes       1148. Temp at 20 minutes         148. Temp at 20 minutes       1150. Temp at 30 minutes         150. Temp at 30 minutes       151. Temp at 30 minutes         152. Temp at 35 minutes       152. Temp at 35 minutes         153. Temp at 40 minutes       155. Temp at 50 minutes         155. Temp at 50 minutes       155. Temp at 50 minutes         155. Temp at 50 minutes       155. Temp at 50 minutes         155. Temp at 50 minutes       155. Temp at 50 minutes         156. Temp at 50 minutes       156. Temp at 50 minutes </td <td>131.</td> <td>Winding Resistance 2-3</td> <td></td>	131.	Winding Resistance 2-3	
134. Test Run Amps A         135. Test Run Voltage Phase B         136. Test Run Voltage Phase C         137. Test Run Voltage Phase C         138. Test Run Amps C         139. DE Horizontal Vibration Reading       0.0124 In/Sec         141. DE Axial Vibration Reading       0.0275 In/Sec         142. ODE Horizontal Vibration Reading       0.0255 In/Sec         143. ODE Vertical Vibration Reading       0.0265 In/Sec         144. ODE Axial Vibration Reading       0.0265 In/Sec         143. ODE Vertical Vibration Reading       0.0265 In/Sec         144. ODE Axial Vibration Reading       0.0255 In/Sec         145. Ambient Temp at start of Test Run       0.0255 In/Sec         146. Temp at 5 minutes       147. Temp at 10 minutes         147. Temp at 10 minutes       148. Temp at 20 minutes         148. Temp at 20 minutes       149. Temp at 20 minutes         150. Temp at 30 minutes       151. Temp at 30 minutes         152. Temp at 36 minutes       153. Temp at 46 minutes         153. Temp at 45 minutes       154. Temp at 45 minutes         155. Temp at 56 minutes       155. Temp at 56 minutes         155. Temp at 50 minutes       155. Temp at 50 minutes         155. Temp at 50 minutes       155. Temp at 50 minutes         156. Temp at 50 minutes       156. Temp at 5	132.	Winding Resistance 1-3	
135. Test Run Voltage Phase B136. Test Run Amps B137. Test Run Voltage Phase C138. Test Run Amps C139. DE Horizontal Vibration Reading0.0124 In/Sec140. DE Vertical Vibration Reading0.0276 In/Sec141. DE Axial Vibration Reading0.0255 In/Sec142. ODE Horizontal Vibration Reading0.0255 In/Sec143. ODE Vertical Vibration Reading0.0188 In/Sec144. ODE Axial Vibration Reading0.0265 In/Sec145. Ambient Temp at start of Test Run0.0255 In/Sec146. Temp at 5 minutes0.0255 In/Sec147. Temp at 10 minutes0.0255 In/Sec148. Temp at 20 minutes0.0124 In/Sec150. Temp at 25 minutes0.0125 In/Sec151. Temp at 30 minutes0.0255 In/Sec152. Temp at 40 minutes0.0255 In/Sec153. Temp at 40 minutes0.0255 In/Sec155. Temp at 50 minutes0.0255 In/Sec156. Temp at 55 minutes0.0255 In/Sec157. Temp at 60 minutes0.0255 In/Sec	133.	Test Run Voltage Phase A	
136. Test Run Amps B137. Test Run Voltage Phase C138. Test Run Amps C139. DE Horizontal Vibration Reading0.0124 In/Sec140. DE Vertical Vibration Reading0.0276 In/Sec141. DE Axial Vibration Reading0.0255 In/Sec142. ODE Horizontal Vibration Reading0.0265 In/Sec143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0265 In/Sec145. Ambient Temp at start of Test Run0.0255 In/Sec146. Temp at 5 minutes147. Temp at 10 minutes148. Temp at 15 minutes148. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 30 minutes153. Temp at 40 minutes155. Temp at 50 minutes155. Temp at 50 minutes155. Temp at 50 minutes155. Temp at 50 minutes156. Temp at 50 minutes155. Temp at 50 minutes157. Temp at 60 minutes157. Temp at 60 minutes	134.	Test Run Amps A	
137. Test Run Voltage Phase C138. Test Run Amps C139. DE Horizontal Vibration Reading0.0124 In/Sec140. DE Vertical Vibration Reading0.0276 In/Sec141. DE Axial Vibration Reading0.0255 In/Sec142. ODE Horizontal Vibration Reading0.0188 In/Sec143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0265 In/Sec145. Ambient Temp at start of Test Run0.0255 In/Sec146. Temp at 5 minutes0.0255 In/Sec147. Temp at 10 minutes0.0255 In/Sec148. Temp at 20 minutes0.0111149. Temp at 20 minutes0.0111150. Temp at 35 minutes0.0111151. Temp at 30 minutes0.0111152. Temp at 35 minutes0.0111153. Temp at 40 minutes0.0111154. Temp at 50 minutes0.0111155. Temp at 50 minutes0.0111156. Temp at 50 minutes0.0111157. Temp at 60 minutes0.0111	135.	Test Run Voltage Phase B	
138. Test Run Amps C139. DE Horizontal Vibration Reading0.0124 In/Sec140. DE Vertical Vibration Reading0.0276 In/Sec141. DE Axial Vibration Reading0.0255 In/Sec142. ODE Horizontal Vibration Reading0.0188 In/Sec143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0265 In/Sec145. Ambient Temp at start of Test Run0.0255 In/Sec146. Temp at 5 minutes0.0255 In/Sec147. Temp at 10 minutes0.0255 In/Sec148. Temp at 20 minutes0.0255 In/Sec150. Temp at 25 minutes0.0255 In/Sec151. Temp at 30 minutes0.0255 In/Sec152. Temp at 30 minutes0.0255 In/Sec153. Temp at 40 minutes0.0255 In/Sec154. Temp at 55 minutes0.0255 In/Sec155. Temp at 60 minutes0.0255 In/Sec155. Temp at 60 minutes0.0255 In/Sec156. Temp at 55 minutes0.0255 In/Sec157. Temp at 60 minutes0.0255 In/Sec	136.	Test Run Amps B	
139. DE Horizontal Vibration Reading0.0124 In/Sec140. DE Vertical Vibration Reading0.0276 In/Sec141. DE Axial Vibration Reading0.0255 In/Sec142. ODE Horizontal Vibration Reading0.0188 In/Sec143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0255 In/Sec145. Ambient Temp at start of Test Run0.0255 In/Sec146. Temp at 5 minutes147. Temp at 10 minutes148. Temp at 15 minutes148. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes153. Temp at 40 minutes154. Temp at 50 minutes155. Temp at 50 minutes155. Temp at 50 minutes156. Temp at 55 minutes155. Temp at 60 minutes157. Temp at 60 minutes157. Temp at 60 minutes	137.	Test Run Voltage Phase C	
140. DE Vertical Vibration Reading0.0276 In/Sec141. DE Axial Vibration Reading0.0255 In/Sec142. ODE Horizontal Vibration Reading0.0188 In/Sec143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0265 In/Sec145. Ambient Temp at start of Test Run0.0255 In/Sec146. Temp at 5 minutes147. Temp at 10 minutes147. Temp at 10 minutes148. Temp at 20 minutes149. Temp at 20 minutes149. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes151. Temp at 30 minutes153. Temp at 40 minutes153. Temp at 40 minutes154. Temp at 45 minutes155. Temp at 50 minutes155. Temp at 50 minutes156. Temp at 55 minutes156. Temp at 55 minutes157. Temp at 60 minutes157. Temp at 60 minutes	138.	Test Run Amps C	
141. DE Axial Vibration Reading0.0255 In/Sec142. ODE Horizontal Vibration Reading0.0188 In/Sec143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0255 In/Sec144. ODE Axial Vibration Reading0.0255 In/Sec145. Ambient Temp at start of Test Run146. Temp at 5 minutes147. Temp at 10 minutes147. Temp at 10 minutes148. Temp at 15 minutes148. Temp at 20 minutes150. Temp at 20 minutes151. Temp at 30 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes153. Temp at 40 minutes155. Temp at 50 minutes156. Temp at 50 minutes155. Temp at 60 minutes157. Temp at 60 minutes	139.	DE Horizontal Vibration Reading	0.0124 In/Sec
142. ODE Horizontal Vibration Reading0.0188 In/Sec143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0255 In/Sec145. Ambient Temp at start of Test Run146. Temp at 5 minutes146. Temp at 5 minutes147. Temp at 10 minutes147. Temp at 10 minutes148. Temp at 20 minutes148. Temp at 20 minutes150. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes154. Temp at 40 minutes155. Temp at 50 minutes155. Temp at 50 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes	140.	DE Vertical Vibration Reading	0.0276 In/Sec
143. ODE Vertical Vibration Reading0.0265 In/Sec144. ODE Axial Vibration Reading0.0255 In/Sec145. Ambient Temp at start of Test Run146. Temp at 5 minutes146. Temp at 5 minutes147. Temp at 10 minutes147. Temp at 10 minutes148. Temp at 15 minutes148. Temp at 20 minutes149. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 30 minutes152. Temp at 40 minutes154. Temp at 40 minutes155. Temp at 50 minutes155. Temp at 50 minutes155. Temp at 60 minutes	141.	DE Axial Vibration Reading	0.0255 In/Sec
144. ODE Axial Vibration Reading0.0255 In/Sec145. Ambient Temp at start of Test Run146. Temp at 5 minutes146. Temp at 5 minutes147. Temp at 10 minutes147. Temp at 10 minutes148. Temp at 15 minutes148. Temp at 20 minutes149. Temp at 20 minutes150. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 35 minutes152. Temp at 35 minutes153. Temp at 40 minutes155. Temp at 45 minutes155. Temp at 50 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes157. Temp at 60 minutes	142.	ODE Horizontal Vibration Reading	0.0188 In/Sec
145. Ambient Temp at start of Test Run146. Temp at 5 minutes147. Temp at 10 minutes148. Temp at 15 minutes149. Temp at 20 minutes150. Temp at 20 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes154. Temp at 45 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes	143.	ODE Vertical Vibration Reading	0.0265 In/Sec
146. Temp at 5 minutes147. Temp at 10 minutes148. Temp at 15 minutes149. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes154. Temp at 45 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes	144.	ODE Axial Vibration Reading	0.0255 In/Sec
147. Temp at 10 minutes148. Temp at 15 minutes149. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes154. Temp at 45 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes	145.	Ambient Temp at start of Test Run	
148. Temp at 15 minutes149. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes154. Temp at 45 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes	146.	Temp at 5 minutes	
149. Temp at 20 minutes150. Temp at 25 minutes151. Temp at 30 minutes152. Temp at 35 minutes153. Temp at 40 minutes154. Temp at 45 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes	147.	Temp at 10 minutes	
<ul> <li>150. Temp at 25 minutes</li> <li>151. Temp at 30 minutes</li> <li>152. Temp at 35 minutes</li> <li>153. Temp at 40 minutes</li> <li>154. Temp at 45 minutes</li> <li>155. Temp at 50 minutes</li> <li>156. Temp at 55 minutes</li> <li>157. Temp at 60 minutes</li> </ul>	148.	Temp at 15 minutes	
<ul> <li>151. Temp at 30 minutes</li> <li>152. Temp at 35 minutes</li> <li>153. Temp at 40 minutes</li> <li>154. Temp at 45 minutes</li> <li>155. Temp at 50 minutes</li> <li>156. Temp at 55 minutes</li> <li>157. Temp at 60 minutes</li> </ul>	149.	Temp at 20 minutes	
152. Temp at 35 minutes153. Temp at 40 minutes154. Temp at 45 minutes155. Temp at 50 minutes156. Temp at 55 minutes157. Temp at 60 minutes	150.	Temp at 25 minutes	
<ul> <li>153. Temp at 40 minutes</li> <li>154. Temp at 45 minutes</li> <li>155. Temp at 50 minutes</li> <li>156. Temp at 55 minutes</li> <li>157. Temp at 60 minutes</li> </ul>	151.	Temp at 30 minutes	
154. Temp at 45 minutes         155. Temp at 50 minutes         156. Temp at 55 minutes         157. Temp at 60 minutes	152.	Temp at 35 minutes	
155. Temp at 50 minutes         156. Temp at 55 minutes         157. Temp at 60 minutes	153.	Temp at 40 minutes	
156. Temp at 55 minutes     157. Temp at 60 minutes	154.	Temp at 45 minutes	
157. Temp at 60 minutes	155.	Temp at 50 minutes	
	156.	Temp at 55 minutes	
158. Motor Paint (P) Pass	157.	Temp at 60 minutes	
	158.	Motor Paint	(P) Pass



















159. Service Technician



#### STANDARD TERMS AND CONDITIONS FOR PURCHASE OF GOOD AND/OR SERVICES

- 1. <u>APPLICABILITY.</u> The sale of any and all goods and/or services by Mock, Inc. d/b/a Hi-Speed Industrial Service ("Hi-Speed") shall be specifically conditioned upon and subject to the following terms and conditions which are incorporated by reference into any contracts and purchase orders with Hi-Speed, and which shall form and become a part of any agreement related thereto. Buyer's acceptance of any offer or quotation made by Hi-Speed for sale of any goods or services is expressly made subject to the terms and conditions set forth herein and to be so effective, Buyer need not sign or approve these Terms and Conditions to be bound hereunder provided a copy of same is provided to Buyer through any means. None of the terms and conditions contained herein may be added to, expanded, changed, modified, superseded or otherwise altered except as revised in writing and duly executed by Hi-Speed, and all orders received by Hi-Speed shall be governed only by the terms and conditions contained herein, notwithstanding any terms, conditions or provisions of any purchase order, release order, authorization or any other form issued by the Buyer. Hi-Speed hereby objects to any additional, modified, changed, deleted, altered or other terms and conditions not contained herein and notifies Buyer that any such terms or provisions are expressly rejected by Hi-Speed.
- 2. PRICE. All quoted prices shall remain firm and binding for a period of thirty (30) days from the date of quotation or for the period specifically stated in the quotation. The price for any and all goods and/or services ordered or approved by Buyer after thirty (30) days from the date of any quotation are subject to any increase in price that may occur after the expiration of thirty (30) days from the issuance of the quotation and the date the Buyer releases any shipment.
- 3. <u>SCOPE OF GOODS AND/OR SERVICES.</u> The goods and/or services provided by Hi-Speed pursuant to any quotation shall be limited exclusively to those goods and/or services expressly identified therein. Hi-Speed does not assume any responsibility and/or liability for the failure to provide any other goods and/or services not identified in any quotation. Modifications, additions or deletions to or from the scope referenced in any quotation shall only be effective if evidenced in writing and signed by Hi-Speed. The sale of any of all goods and/or services affected by such modification, addition or deletion shall be subject to these same Standard Terms and Conditions whether or not referenced therein.
- 4. <u>BILLING AND PAYMENT TERMS.</u> Hi-Speed shall invoice Buyer for all goods and/or services as same are rendered at the address listed on the quotation. Payments for all goods and/or services shall be due thirty (30) days from the date of the current invoice or as otherwise set forth in the quotation. Late payments are subject to a late fee of 5% of the total invoice amount. Recurring late payments may lead to a deposit requirement on future services or sale of goods. Buyer shall be liable to Hi-Speed for any and all fees and expenses incurred by Hi-Speed to collect any invoices or to enforce these Standard Terms and Conditions, including but not limited to, attorney's fees.
- 5. DELIVERY OF GOODS AND/OR SERVICES. Unless otherwise identified in the quotation, all shipments are F.O.B. Hi-Speed's warehouse and the title to and all risk of loss with respect to any goods shipped shall pass to Buyer when such goods are delivered to the carrier at Hi-Speed's warehouse. Hi-Speed will use its best efforts to affect delivery by the date or dates specified in the quotation. However, Hi-Speed shall not be liable for delay in or failure to make shipment, or to perform services, by any identified date for any reason whatsoever, including but not limited to, causes beyond its reasonable control, such as strikes, fires, floods, epidemics, quarantines, restrictions, severe weather, embargos, acts of God, or public enemy, war, riot, delays in transportation or the inability to obtain necessary labor, materials or manufacturing facilities.
- 6. DELIVERY SITE AND TIME FOR PERFORMANCE. Hi-Speed and Buver agree that time is of the essence for the purchase order and that Buyer shall fully cooperate with Hi-Speed in order to allow Hi-Speed full access to prosecute its work diligently and in an orderly manner. Buyer shall assist Hi-Speed in every way possible to avoid delaying, disrupting or interfering with the progress of Hi-Speed's work at the project site. In the event Hi-Speed's work is delayed, hindered, suspended, disrupted, re-sequenced or interfered with or rendered less efficient or more costly or adversely affected in any way as a result of acts or omissions of Buyer or other contractors or employees of Buyer or by any other reason beyond Hi-Speed's control and without the fault of Hi-Speed, then, in such event, Buyer shall be liable to Hi-Speed for any damages, additional costs, expenses, labor, materials, man hours, acceleration costs, overtime, additional jobsite overhead, extended home office overhead, and any and all other direct and indirect expenses of whatsoever nature or kind, caused in whole or in part, as a result of any of the above-referenced occurrences. Hi-Speed's project records will be the basis for computing the additional costs and damages of Hi-Speed's labor, materials, expenses and overhead related to such changes. BUYER WARRANTS THAT THE SITE FOR DELIVERY OR INSTALLATION OF ANY GOODS AND/OR FOR THE PERFORMANCE OF ANY SERVICES SHALL BE READY AND ADEQUATE FOR HI-SPEED'S DELIVERY OF GOODS AND/OR PERFORMANCE OF SERVICES AND THAT HI-SPEED SHALL HAVE FULL ACCESS THERETO, FREE OF ALL OBSTRUCTIONS. BUYER SHALL ASSUME ALL EXTRA COSTS ASSOCIATED WITH HI-SPEED'S INABILITY TO INSTALL ANY GOODS OR PERFORM ANY SERVICES AS A RESULT OF BUYER'S FAILURE TO COMPLY WITH THIS PROVISION. HI-SPEED MAY NOT INSPECT THE SITE PRIOR TO DELIVERY AND/OR INSTALLATION OF GOODS AND/OR PERFORMANCE OF SERVICES AND MAKES NO WARRANTY AS TO THE SUFFICIENCY OF THE SITE FOR THE DELIVERY AND/OR INSTALLATION OF GOODS AND/OR THE PERFORMANCE OF SERVICES AT SUCH SITE.
- 7. INSPECTION/ACCEPTANCE. All goods and services ordered pursuant to any quotation shall be subject to inspection by Buyer after delivery or performance to determine conformity with the quotation and/or purchase order and Hi-Speed's advertised or published specifications. Buyer shall have a period of thirty (30) days from shipment of goods at the delivery destination specified in the quotation within which to inspect the goods for conformity with the quotation, order and/or Hi-Speed's advertised and published specifications and to provide Hi-Speed with written notice of any discrepancy or rejection. Buyer shall have a period of thirty (30) days following completion of any services within which to inspect the services for conformity with the quotation, purchase order and/or Hi-Speed's advertised and published specifications and to provide Hi-Speed with written notice of any discrepancy or rejection. If the goods delivered or services performed do not so conform, upon delivery of notice to Hi-Speed of any discrepancy, nonconformance or rejection, Hi-Speed shall have sixty (60) days to cure the alleged discrepancy and/or nonconformance. If Hi-Speed fails to cure in this time period, Buyer shall have the right to reject such goods or services. After the cure period, goods that have been delivered and rejected, in whole or in part, shall be returned to Hi-Speed shall, at its sole cost, re-perform the non-conforming services. Inspection or failure to inspect on any occasion shall not affect Buyer's rights under the warranty provisions herein.
- 8. WARRANTIES. Hi-Speed warrants that all goods shall conform in all material aspects to the goods identified in the quotation to Buyer and/or purchase order, and Hi-Speed makes to Buyer the manufacturer's express warranty for any goods sold to Buyer, which is offered by the manufacturer at the time of acceptance of any quotation by Buyer. This warranty is conditioned upon the installation, operation, and maintenance of the goods in accordance with the manufacturer's recommendations and/or standard industry practice and the goods at all times being operated or used under normal operating conditions for which they were designed. Hi-Speed, at its sole option, will repair or

**TermsAndConditions** 

replace any defective or non-conforming goods in accordance with the applicable manufacturer's warranty. Warranty for any defective or incorrect parts is limited to the repair or replacement of those parts. Hi-Speed warrants that all services will conform in all material respects to the description of services identified in the quotation and will be performed in a good and workmanlike manner in accordance with industry practices and standards. Should the services be reasonably rejected or not conform with the foregoing warranties, Hi-Speed shall, at its sole cost, re-perform the defective or nonconforming services. Notwithstanding the foregoing, these warranties do not extend to goods or services to the extent that such goods have been subject to misuse, neglect or abuse not caused by Hi-Speed or have been used in violation of the approved written instructions furnished to Buyer. THE FOREGOING REPRESENTS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY HI-SPEED WITH RESPECT TO ALL GOODS SOLD AND IS IN LIEU OF ALL OTHER WARRANTIES EITHER EXPRESS OR IMPLIED. HI-SPEED EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICLAR USE OR PURPOSE. BUYER WAIVES ANY CLAIM THAT THESE EXCLUSIONS OR LIMITATIONS DEPRIVE IT OF AN ADEQUATE REMEDY AT EQUITY OR LAW OR CAUSE THIS AGREEMENT TO FAIL IN ITS ESSENTIAL PURPOSE. BUYER SHALL BE ENTITLED TO NO OTHER REMEDY OTHER THAN AS SET FORTH HEREIN, REGARDLESS OF THE CLAIM OR CAUSE OF ACTION, WHETHER BASED IN CONTRACT, TORT, NEGLIGENCE, GOODS LIABILITY, STRICT LIABILITY OR OTHERWISE.

- 9. LIMITATION OF DAMAGES. HI-SPEED SHALL HAVE NO LIABILITY TO BUYER WITH RESPECT TO THE SALE OR DELIVERY OF ANY GOODS OR THE REPAIR THEREOF OR WITH RESPECT TO THE SALE OR PERFORMANCE OF ANY SERVICES, FOR LOST PROFITS, SPECIAL, CONSEQUENTIAL, EXEMPLARY, PUNITIVE OR INCIDENTAL DAMAGES OF ANY KIND OR NATURE WHETHER ARISING IN CONTRACT, TORT, GOODS LIABILITY OR OTHERWISE, EVEN IF HI-SPEED WAS ADVISED OF THE POSSIBILITY OF SUCH LOSS OR DAMAGES. HI-SPEED SHALL NOT BE LIABLE FOR ANY DAMAGES OR DELAYS CAUSED BY ANY FAILURE TO MAKE ANY DELIVERY OF GOODS BY ANY EXPECTED TIME OR DATE OR THE FAILURE TO PROVIDE OR COMPLETE ANY SERVICES BY ANY EXPECTED DATE OR TIME. IN NO EVENT SHALL HI-SPEED BE LIABLE TO BUYER FOR ANY DAMAGES WHATSOEVER IN EXCESS OF THE TOTAL PRICE PAID FOR ALL GOODS AND/OR SERVICES HEREUNDER OR REFERENCED IN ANY QUOTATION OR THE PURCHASE ORDER.
- 10. <u>SEVERABILITY</u>. The partial or complete invalidity of any provision of these Standard Terms and Conditions shall not affect the enforceability of the remainder of these Standard Terms and Conditions. If any provision is found to be invalid or unenforceable, that portion shall be modified to make it enforceable or shall be stricken and the remainder of these Standard Terms and Conditions shall enforced.
- 11. <u>GOVERNING LAW AND JURISDICTION.</u> Any controversy arising out of any quotation, the purchase order, the goods sold or delivered, repair or replacement thereof, or any services provided pursuant to any quotation or any purchase order, or these Standard Terms and Conditions shall be governed by the laws of the state of Tennessee without regard to any choice of law provisions and any cause of action related in any manner thereto shall be brought only in the state or federal courts of Shelby County, Tennessee.
- 12. <u>ABANDONED EQUIPMENT.</u> Hi-Speed requires that Buyer promptly pick up or provide shipment instructions for Buyer equipment or other Buyer property in Hi-Speed's possession. If equipment or other Buyer property is left with Hi-Speed and not picked up within six (6) months after Hi-Speed's final action related to the applicable property (e.g. evaluation, teardown, estimate, completion of services), Hi-Speed will consider such property abandoned and may dispose of it in accordance with applicable law. Buyer agrees to hold Hi-Speed harmless for any damage or claim for such abandoned property and acknowledges that Hi-Speed may discard or recycle it at Hi-Speed's sole and absolute discretion. Specifically, Hi-Speed may sell Buyer's abandoned property at a private or public sale and retain the proceeds to offset Hi-Speed's storage, inspection and servicing costs. For the avoidance of doubt, Hi-Speed reserves its statutory and other lawful liens for unpaid charges related to abandoned property.
- 13. FORCE MAJEURE. Neither party shall be responsible for any delay or failure in performance of any party of the quotation, purchase order or these Standard Terms and Conditions to the extent that such delays or failures are caused by fire, flood, earth quake, explosion, war, embargo, government requirement, civil or military authority, acts of God, or any other circumstances beyond its reasonable control and not involving any fault or negligence on the party affected ("Condition"). If any such Condition occurs, the party delayed or unable to perform shall promptly give written notice to the other party and, if such Condition remains at the end of thirty (30) days, the party affected by the other party's delay and inability to perform may elect to (i) terminate such order or part thereof, or (ii) suspend the order for the duration of the Condition, if the Buyer is the suspending party, buy elsewhere comparable material to be sold under the order and apply to any commitment the purchase price of such purchase, and resume performance of the order once the Condition ceases, with an option in the affected party to extend the period of this order up to the length of the time the Condition endures.
- 14. <u>NONWAIVER</u>. No course of dealing or failure of either party to strictly enforce any term, right, or condition of these Standard Terms and Conditions will be construed as a waiver of such term, right or condition. Any waiver by Hi-Speed will only be in writing and will waive no succeeding breach of a term, right or condition.
- 15. <u>ASSIGNMENT.</u> The rights and obligations of the parties shall neither be assigned nor delegated without the prior written consent of the other party. However, any party may assign or delegate its respective rights and obligations, in whole or in part, (i) to any subsidiary, (ii) pursuant to other financing, merger or reorganization or (iii) pursuant to any sale or transfer of substantially all of the assets of the assigning party. These Standard Terms and Conditions shall bind the heirs, successors and assigns of the parties hereto.
- 16. <u>NO INDIVIDUAL LIABILITY</u>. Notwithstanding any other agreement to the contrary, the Buyer agrees that in no event will the Buyer hold and HI-Speed owner, director, officer or employee personally liable for unintentional tortious conduct or conduct that constitutes the breach of any contract between HI-Speed and the Buyer, even if the HI-Speed owner, director, officer or employee is or could be construed to be a party to such contract.