


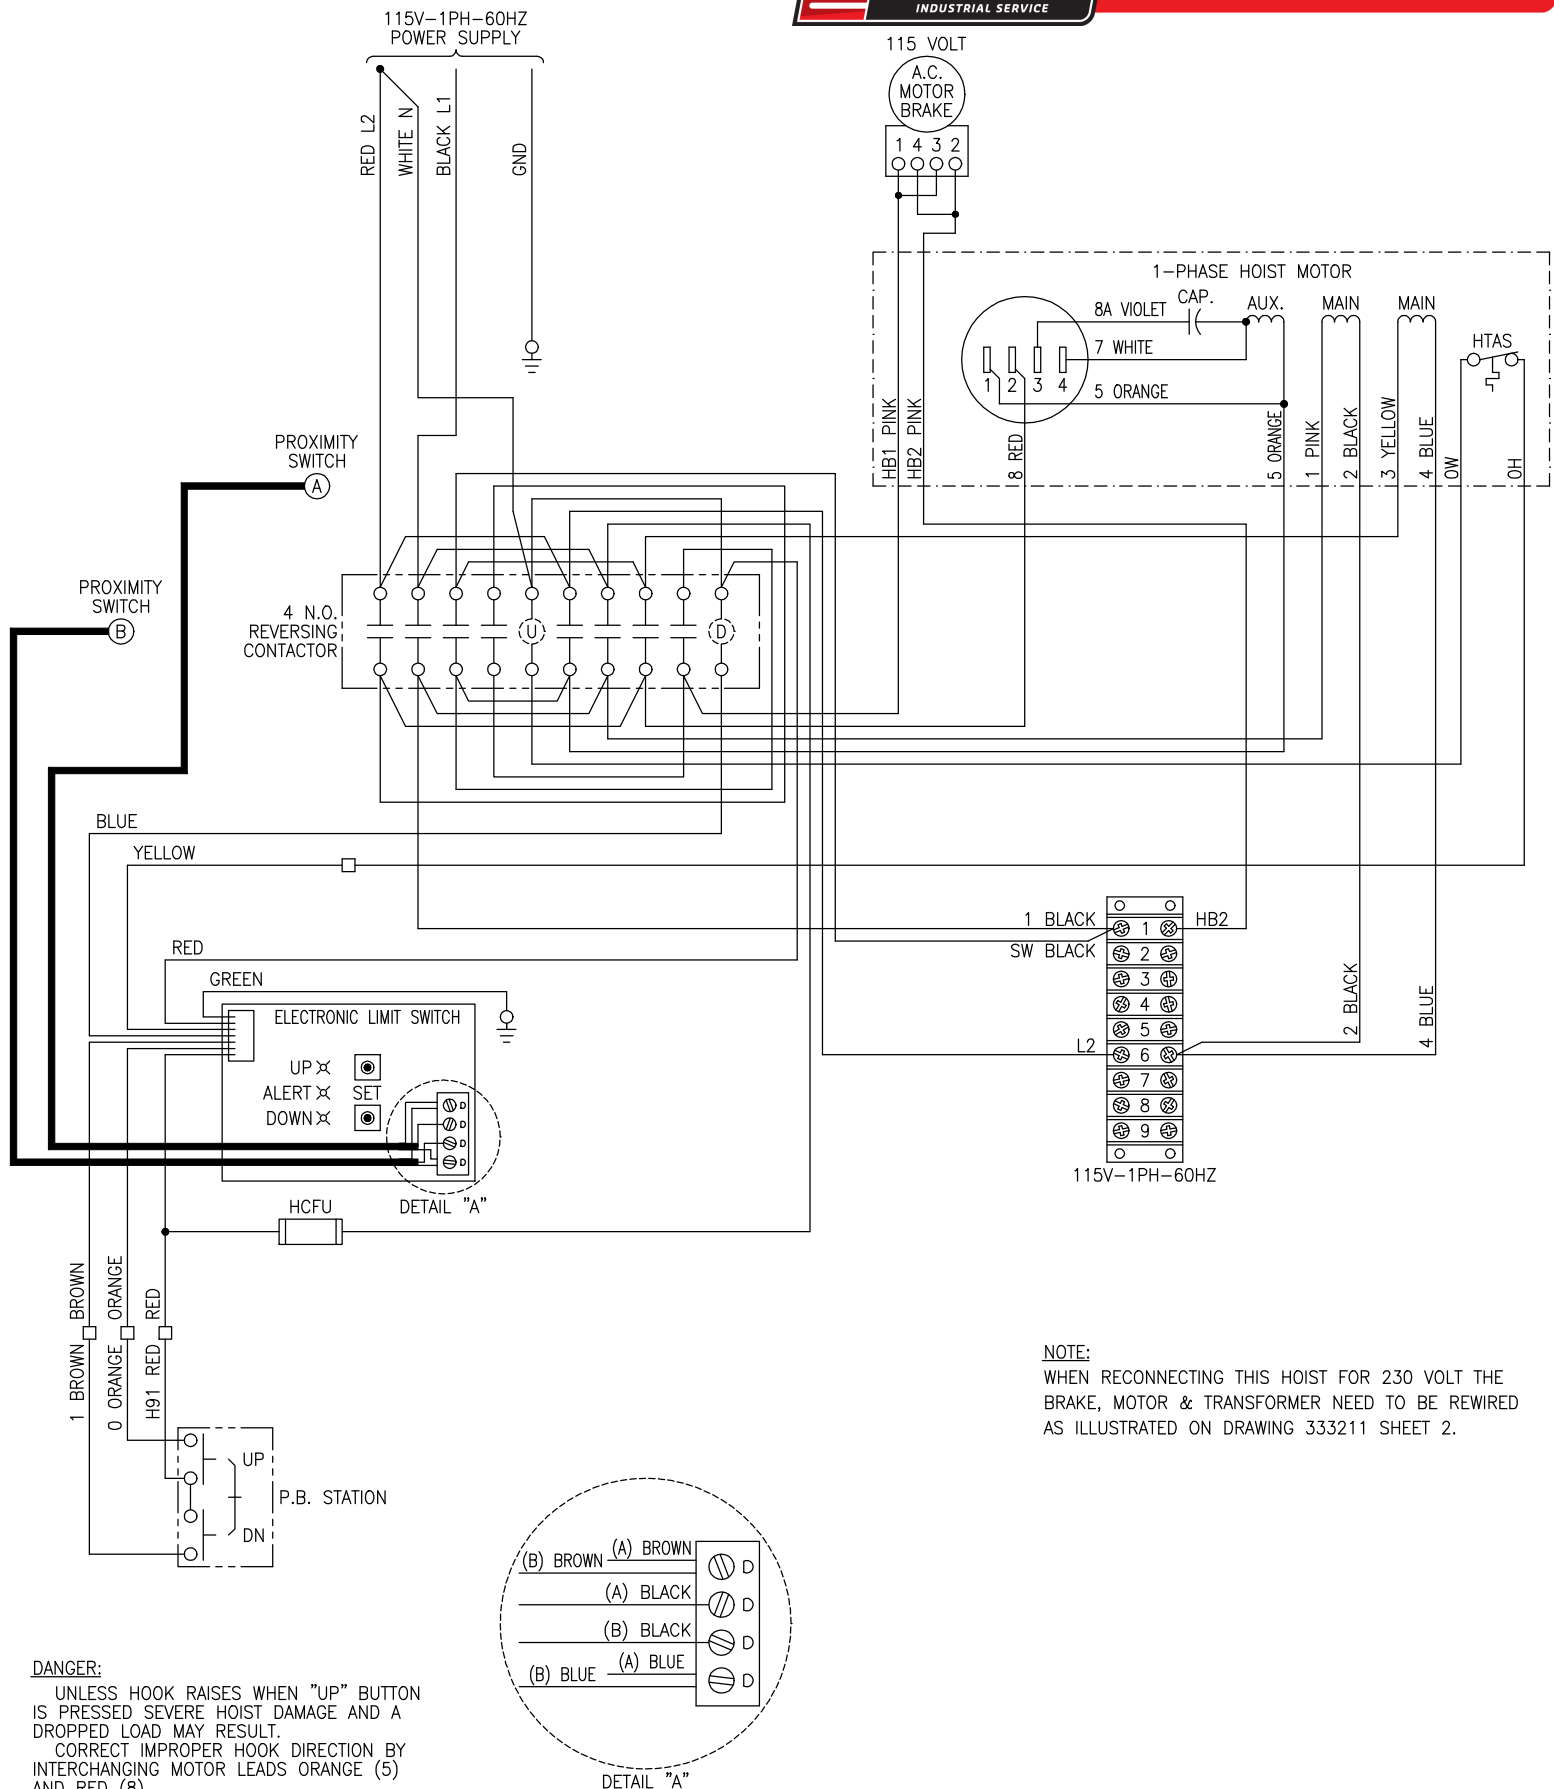

NOTE:

WHEN RECONNECTING THIS HOIST FOR 230 VOLT THE
BRAKE, MOTOR & TRANSFORMER NEED TO BE REWIRED
AS ILLUSTRATED ON DRAWING 333211 SHEET 2.

DANGER:

UNLESS HOOK RAISES WHEN "UP" BUTTON IS PRESSED SEVERE HOIST DAMAGE AND A DROPPED LOAD MAY RESULT.

CORRECT IMPROPER HOOK DIRECTION BY
INTERCHANGING MOTOR LEADS ORANGE (5)
AND RED (8).

DO NOT CHANGE PUSHBUTTON WIRING.

WARNING

THIS EQUIPMENT MUST BE EFFECTIVELY GROUNDING ACCORDING TO APPLICABLE CODES.

AVERTISSEMENT

CET EQUIPMENT DOIT ETRE MIS A'LA TERRE
EN ACCORDANCE AVEC LES NORMES EN
VIGUEUR.

NO.	CHANGE	DATE	ITL.	WIRING DIAGRAM	115 VOLT
				1 PHASE RECONNECTABLE	
				A.C. SOLENOID BRAKE, STEARNS REVERSING SWITCH	
				BUDGET ELECTRIC HOIST	
				SC. -----	 YALE • LIFT-TECH division of Columbus McKinnon Corporation Muskegon, Michigan 49443
				DA. 8/29/06	
				DR. RITTER	
				CK.	
				SHEET 1 OF 4 SHEETS	333211