

EVERY DAY SINCE 1946

LR Motor Shop Repairs

Job Number 101614

Prepared for CoorsTek Inc.

3315 Boone Road Benton AR 72015

Table of Contents

AC Inspection as Found - LR MOTORSHOP



AC Inspection as Found

CoorsTek Inc. 3315 Boone Road Benton, AR 72015

AC Inspection - Rev. 2

Location:	LR MOTORSHOP
Serial Number:	1048562634

Description:150HP WEG 1800RPM 444/5TD

Hi-Speed Job Number:	101614
Manufacturer:	WEG
Product Number:	14814240
Serial Number:	1048562634
HP/kW:	150 (HP)
RPM:	1780 (RPM)
Frame:	444/5TD
Voltage:	460
Current:	170
Phase:	Three
Hz:	60 (Hz)
Service Factor:	1.00
Enclosure:	TEFC
J-box Included:	Complete
Coupling/Sheave:	None
Bearing RTDs:	No
Stator RTDs:	No
Repair Stage:	Final
Heaters:	No
Winding Type :	Random Wound
Bearing Type:	Rolling Element

Priorities Found: 🔵 3 - High

Jh 🛛 🕘 7 - Good

Overall Condition

- 1. Report Date
- 2. Nameplate Picture



3. Photos of all six sides of the machine.

Hi-Speed Industrial Service disclaims all warranties, both express and implied, relating to the information, reports, opinions and analysis disclosed to the Customer by Hi-Speed. Hi-Speed shall not be liable for any errors or omissions, or any losses, injury or damages arising from the use of such information, reports, opinions and analysis by the Customer.

Hi-Speed Industrial Service 7030 Ryburn Dr Millington, Tn 38053 901-873-5300

> FolderID: 101614 FormID: 17310195




















































101614	Tiending	-	144	
	WRTR-100H	PStep 💌	Edit Test ID F Enable Calibration	
For AUDIOR	- Makara	The Avenue		
Tanguation	Presistance Te	A REAL PROPERTY.		
	monaue	Manual	Tener	
	Restance	JLassiLow V	The second value of the se	
DC Tem	Heplin'	600 Viata		
-		500 Yules		
		2000 Vials		
Lupp Ted		2000 (1.8%)		
	Sep	10001/44	STREET, SQUARE, SQUARE	
				42







	4.	Describe the Overall Condition of the Equipment as Received	
		Dirty	
In	itial	Mechanical/Electrical	
	5.	Does Shaft Turn Freely?	(Yes) Yes
	6.	Does Shaft Have Visible Damage?	(No) No
	7.	Assembled Shaft Runout	0.001 Inches
	8.	Assembled Shaft End Play	inches
	9.	Air Gap Variation <10%	
	10.	Lead Condition	(P) Pass
	11.	Lead Length	8 Inches
	12.	Lead Numbers	T1-T6
	13.	Frame Condition	pass

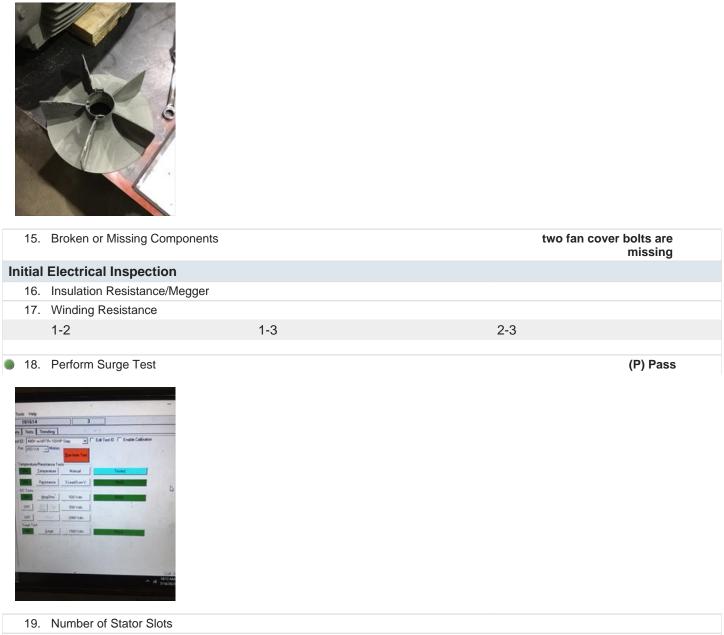

20. Stator Condition

Hi-Speed Industrial Service disclaims all warranties, both express and implied, relating to the information, reports, opinions and analysis disclosed to the Customer by Hi-Speed. Hi-Speed shall not be liable for any errors or omissions, or any losses, injury or damages arising from the use of such information, reports, opinions and analysis by the Customer.

pass

21. Stator Thermistors/Ohms



22.	Stator Overloads/Ohms	na	
Mecha	Mechanical Inspection		
23.	Drive End Bearing Brand		
24.	Drive End Bearing Number-	6319	
25.	Drive End Bearing Qty.	1	
26.	Drive End Bearing Type	(Ball) Ball Bearing	
27.	Drive End Lubrication Type	(Grease) Grease Lubricated	
28.	Drive End Bearing Insulation or Grounding Device?	na	
29.	Drive End Wavy Washer/Snap-Ring Other Retention Device?	na	
30.	Drive End Bearing Condition	excessive contamination	



31. Opposite Drive End Bearing Brand	
32. Opposite Drive End Bearing Number-	6316
33. Opposite Drive End Bearing Qty.	1
34. Opposite Drive End Bearing Type	(Ball) Ball Bearing
35. Opposite Drive End Lubrication Type	(Grease) Grease Lubricated
36. Opposite Drive End Bearing Insulation or Grounding Device?	na
37. Opposite Drive End Wavy Washer/Snap-Ring Other Retention Device?	bearing cap springs

38. Opposite Drive End Bearing Condition



One bit octal Junget 40. Opposite Drive End Seal slinger Rotor Inspection (Squirrel Aluminum) Squirrel Cage Aluminum) Die Cast 41. Rotor Type/Material (Squirrel Aluminum) Die Cast 42. Growler Test (Pass) Pass 43. Number of Rotor Bars 40 44. Rotor Condition pass 45. List the Parts needed for the Repair Below 6376 6376 2 fan cover bolts 46. Signature of Technician that Disassembled Motor Cw Mechanical Fits- Rotor Cw 47. Shaft Runout 0.001 inches 48. Rotor Runout 0.001 inches 9. Coupling Fit Closest to Bearing Housing 0 0 Degrees 90 Degrees 120 Degrees 49. Coupling Fit Closest to the end of the Shaft 0 0 Degrees 60 Degrees 120 Degrees 9. Divie End Bearing Shaft Fit 0 0 Degrees 60 Degrees 120 Degrees 9. Drive End Bearing Shaft Fit (P) Pass 0 Degrees 60 Degrees 120 Degrees 52. Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit 0 Degrees 0 Degr	30	Drive End Seal		slinger
Rotor Inspection 41. Rotor Type/Material (Squirrel Aluminum) Squirrel Cage Aluminum Die Cast 42. Growler Test (Pass) Pass 43. Number of Rotor Bars 40 44. Rotor Condition pass 45. List the Parts needed for the Repair Below 6319 2 fan cover bolts 6319 2 fan cover bolts 46. Signature of Technician that Disassembled Motor Cw Weethernical Fits- Rotor 47. Shaft Runout 0.001 inches 48. Rotor Runout 0.001 inches 49. Rotor Runout 0.001 inches 49. Rotor Runout 0.001 inches 49. Coupling Fit Closest to Bearing Housing 0 Degrees 0 Degrees 90 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 0 Degrees 60 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit (P) Pass 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 52. Drive End Bearing Shaft Fit Conditi				_
41. Rotor Type/Material (Squirrel Aluminum) Squirrel Cage Aluminum Die Cast 42. Growler Test (Pass) Pass 43. Number of Rotor Bars 40 44. Rotor Condition pass 45. List the Parts needed for the Repair Below G319 G316 pass 46. Signature of Technician that Disassembled Motor Cw 46. Signature of Technician that Disassembled Motor Cw 46. Signature of Technician that Disassembled Motor Cw 47. Shaft Runout 0.001 inches 48. Rotor Runout 0.001 inches 49. Coupling Fit Closest to Bearing Fit Rotor Body 0 Degrees 90 Degrees 120 Degrees 90 Degrees 60 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 0 0 Degrees 60 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit 0 0 0 62. Drive End Bearing Shaft Fit (P) Pass (P) Pass 52. Drive End Bearing Shaft Fit (P) Pass (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass (P) Pass 54. Drive End Bearing Shaft Fit 0 (P) Pass (P) Pass				Singer
42. Growler Test (Pass) Pass 43. Number of Rotor Bars 40 44. Rotor Condition pass 44. Rotor Condition pass 45. List the Parts needed for the Repair Below 6376 6376 2 fan cover boits 46. Signature of Technician that Disassembled Motor Cw 46. Signature of Technician that Disassembled Motor Cw 47. Shaft Runout 0.001 inches 48. Rotor Runout 0.001 inches 49. Coupling Fit Closest to Bearing Fit Rotor Body Opposite Drive End Bearing 49. Coupling Fit Closest to Bearing Housing 0 Degrees 90 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 0 0 61. Drive End Bearing Shaft Fit 0 Degrees 120 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 120 Degrees 52. Drive End Bearing Shaft Fit (P) Pass 0 53. Opposite Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 120 Degrees <		•		
43. Number of Rotor Bars 40 44. Rotor Condition pass 45. List the Parts needed for the Repair Below 6319 6319 2 fan cover bolts 46. Signature of Technician that Disassembled Motor Cw Mechanical Fits- Rotor 47. Shaft Runout 0.001 inches 48. Rotor Runout 0.001 inches 49. Coupling Fit Closest to Bearing Fit Rotor Body 0 Degrees 90 Degrees 90 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 0 Degrees 60 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit 0 0 Degrees 61. Drive End Bearing Shaft Fit 0 Degrees 120 Degrees 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit 0 652. Drive End Bearing Shaft Fit Condition (P) Pass 63. Opposite Drive End Bearing Shaft Fit 0 652. Drive End Bearing Shaft Fit Condition (P) Pass 63. Opposite Drive End Bearing Shaft Fit 0 63. Opposite Drive End Bearing Shaft Fit 0 64. Drive End Bearing Sha	41.	Rotor Type/Material		(Squirrei Aluminum) Squirrei Cage Aluminum Die Cast
44. Rotor Condition pass 45. List the Parts needed for the Repair Below 6319 6319 6336 2 fan cover bolts Cw 46. Signature of Technician that Disassembled Motor Cw Mechanical Fits- Rotor 47. Shaft Runout 0.001 inches 48. Rotor Runout 0.001 inches 48. Rotor Runout 0.001 inches 49. Coupling Fit Closest to Bearing Housing 0 Degrees 0 Degrees 90 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 Degrees 120 Degrees 61. Drive End Bearing Shaft Fit 0 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 120 Degrees 52. Drive End Bearing Shaft Fit Condition (P) Pass 63. Opposite Drive End Bearing Shaft Fit Condition (P) Pass 63. Opposite Drive End Bearing Shaft Fit Condition (P) Pass	42.	Growler Test		(Pass) Pass
45. List the Parts needed for the Repair Below 6319 8376 2 fan cover bolts 46. Signature of Technician that Disassembled Motor Cw Mechanical Fits- Rotor 47. Shaft Runout 0.001 inches 48. Rotor Runout 0.001 inches 9. Coupling Fit Closest to Bearing Fit Rotor Body Opposite Drive End Bearing 49. Coupling Fit Closest to Bearing Housing 0 Degrees 90 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 Degrees 60 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 Degrees 60 Degrees 51. Drive End Bearing Shaft Fit 60 Degrees 120 Degrees 52. Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass	43.	Number of Rotor Bars		40
6319 6316 2 fan cover bolts Cw 46. Signature of Technician that Disassembled Motor Cw 46. Signature of Technician that Disassembled Motor Cw 46. Signature of Technician that Disassembled Motor Cw 47. Shaft Runout 0.001 inches 47. Shaft Runout 0.001 inches 48. Rotor Runout 0 9 Drive End Bearing Fit Rotor Body Opposite Drive End Bearing 49. Coupling Fit Closest to Bearing Housing 0 0 60 Degrees 90 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 0 60 Degrees 60 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit 0 0 61. Drive End Bearing Shaft Fit (P) Pass 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass	44.	Rotor Condition		pass
Mechanical Fits- Rotor 47. Shaft Runout 47. Shaft Runout 48. Rotor Runout Drive End Bearing Fit Rotor Body 0 Degrees 90 Degrees 49. Coupling Fit Closest to Bearing Housing 0 Degrees 90 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 Degrees 90 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 11. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 12. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 12. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 12. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 12. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 12. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees	45.	6319 6316	elow	
47. Shaft Runout 0.001 inches 48. Rotor Runout Opposite Drive End Bearing Fit Prive End Bearing Fit Rotor Body Opposite Drive End Bearing 49. Coupling Fit Closest to Bearing Housing 0 Degrees 90 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 120 Degrees 52. Drive End Bearing Shaft Fit 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit 53. Opposite Drive End Bearing Shaft Fit 120 Degrees 120 Degrees	46.			
48. Rotor Runout Rotor Body Opposite Drive End Bearing 49. Coupling Fit Closest to Bearing Housing 120 Degrees 90 Degrees 90 Degrees 50. Coupling Fit Closest to the end of the Shaft 120 Degrees 0 Degrees 60 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 0 Degrees 60 Degrees 3.7407 3.7407 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit 120 Degrees 60 Degrees 60 Degrees	Mecha	anical Fits- Rotor		
Drive End Bearing Fit Rotor Body Opposite Drive End Bearing 49. Coupling Fit Closest to Bearing Housing 120 Degrees 0 Degrees 90 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 120 Degrees 51. Drive End Bearing Shaft Fit 120 Degrees 51. Drive End Bearing Shaft Fit 120 Degrees 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit Condition 120 Degrees 53. Opposite Drive End Bearing Shaft Fit Condition (P) Pass 54. Drive End Bearing Shaft Fit Condition 120 Degrees	47.	Shaft Runout		0.001 inches
49. Coupling Fit Closest to Bearing Housing 120 Degrees 0 Degrees 90 Degrees 50. Coupling Fit Closest to the end of the Shaft 120 Degrees 0 Degrees 60 Degrees 51. Drive End Bearing Shaft Fit 120 Degrees 0 Degrees 60 Degrees 3.7407 3.7407 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit 120 Degrees 60 Degrees 60 Degrees 120 Degrees 120 Degrees	48.	Rotor Runout		
0 Degrees 90 Degrees 120 Degrees 50. Coupling Fit Closest to the end of the Shaft 0 Degrees 60 Degrees 120 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 120 Degrees 3.7407 60 Degrees 120 Degrees 52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit (P) Pass 53. Opposite Drive End Bearing Shaft Fit 120 Degrees		Drive End Bearing Fit	Rotor Body	Opposite Drive End Bearing
50. Coupling Fit Closest to the end of the Shaft 0 Degrees 60 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 3.7407 60 Degrees 3.7407 3.7408 52. Drive End Bearing Shaft Fit Condition 53. Opposite Drive End Bearing Shaft Fit Condition 60 Degrees 60 Degrees 120 Degrees (P) Pass 53. Opposite Drive End Bearing Shaft Fit Condition 0 Degrees 60 Degrees 120 Degrees 120 Degrees	49.	Coupling Fit Closest to Bearing Housin	ng	
50. Coupling Fit Closest to the end of the Shaft 0 Degrees 60 Degrees 51. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 3.7407 60 Degrees 3.7407 3.7408 52. Drive End Bearing Shaft Fit Condition 53. Opposite Drive End Bearing Shaft Fit Condition 60 Degrees 60 Degrees 120 Degrees (P) Pass 53. Opposite Drive End Bearing Shaft Fit Condition 0 Degrees 60 Degrees 120 Degrees 120 Degrees		0 Degrees	90 Degrees	120 Degrees
0 Degrees60 Degrees120 Degrees51.Drive End Bearing Shaft Fit60 Degrees120 Degrees0 Degrees60 Degrees120 Degrees3.74073.7408(P) Pass52.Drive End Bearing Shaft Fit Condition(P) Pass53.Opposite Drive End Bearing Shaft Fit60 Degrees60 Degrees60 Degrees120 Degrees		5	<u> </u>	<u> </u>
51. Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 3.7407 3.7407 52. Drive End Bearing Shaft Fit Condition 53. Opposite Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 0 Degrees 120 Degrees (P) Pass 73. Opposite Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 120 Degrees	50.	Coupling Fit Closest to the end of the	Shaft	
0 Degrees60 Degrees120 Degrees3.74073.74073.740852.Drive End Bearing Shaft Fit Condition(P) Pass53.Opposite Drive End Bearing Shaft Fit(P) Pass54.0 Degrees60 Degrees120 Degrees		0 Degrees	60 Degrees	120 Degrees
0 Degrees60 Degrees120 Degrees3.74073.74073.740852.Drive End Bearing Shaft Fit Condition(P) Pass53.Opposite Drive End Bearing Shaft Fit(P) Pass54.0 Degrees60 Degrees120 Degrees				
3.74073.74073.740852.Drive End Bearing Shaft Fit Condition(P) Pass53.Opposite Drive End Bearing Shaft Fit0 Degrees0 Degrees60 Degrees120 Degrees	51.	Drive End Bearing Shaft Fit		
52. Drive End Bearing Shaft Fit Condition (P) Pass 53. Opposite Drive End Bearing Shaft Fit 60 Degrees 0 Degrees 60 Degrees 120 Degrees		0 Degrees	60 Degrees	120 Degrees
53. Opposite Drive End Bearing Shaft Fit 0 Degrees 60 Degrees 120 Degrees		3.7407	3.7407	3.7408
0 Degrees 60 Degrees 120 Degrees	52.	Drive End Bearing Shaft Fit Condition		(P) Pass
	53.	Opposite Drive End Bearing Shaft Fit		
		0 Degrees	60 Degrees	120 Degrees
		-	-	-

54.	Opposite Drive End Bearing Shaft Fit	Condition		(P) Pass
55.	Shaft Air Seal Fits			
	Drive End Air Seal	Opposite Drive End Air Seal		
Mecha	anical Fits- Bearing Housings			
56.	Drive End - Endbell Bearing Fit			
	0 Degrees	60 Degrees	120 Degrees	
	7.8752	7.8751	7.875	
57.	Drive End - Endbell Bearing Fit Condi	tion		(P) Pass
58.	Opposite Drive End - Endbell Bearing	Fit		
	0 Degrees	60 Degrees	120 Degrees	
	6.6945			
9 59.	Opposite Drive End - Endbell Bearing	Fit Condition		(F) Fail
60.	Bearing Cap Condition			
	Drive End Bearing Cap	Opposite Drive End Bearing Cap		

Pass



61.	End Bell Air Seal Fits		
	Drive End Air Seal	Opposite Drive End Air Seal	
62.	List Machine Work Needed Below		
	ODE end bell bearing fit		
63.	Technician		Cw
	Im		
Dynai	nic Balance Report		
64.	Rotor Weight and Balance Grade		
	Rotor Weight	Balance Grade	
65.	Initial Balance Readings		
	Drive End	Opposite Drive End	

66.	Final Balance Readings		
	Drive End	Opposite Drive End	
67.	Technician		
Rewir	nd		
68.	Core Test Results - Watts loss per Po	und	
	Pre-Burnout	Post Burnout	
69.	Core Hot Spot Test		
	Pre-Burnout	Post-Burnout	
		-	
	Post Rewind Electrical Test- Insulation	n Resistance	
	Post Rewind Polarization Index		
72.	Post Rewind Winding Resistance		
	1-2	1-3	2-3
73	Post Rewind Surge Test		
	Post Rewind Hi-Pot		
	Technician		
	Cause of Failure		
	Failure locations		
70.	Bearings		
77	Root cause of failure		
	Contamination		
Mach	anical Fits- Rotor - Post Repair		
	Shaft Runout Post Repair		
	Rotor Runout Post Repair		
79.	Drive End Bearing Fit	Rotor Body	Opposite Drive End Bearing
	Drive End Bearing Fit	Rotor Body	Opposite Drive End Bearing
80.	Coupling Fit Closest to Bearing Housi	ng Post Repair	
	0 Degrees	90 Degrees	120 Degrees
81.	Coupling Fit Closest to the end of the	Shaft Post Repair	
	0 Degrees	60 Degrees	120 Degrees
82.	Drive End Bearing Shaft Fit Post Repa		
	0 Degrees	60 Degrees	120 Degrees
02	Opposite Drive End Positing Shoft Eit	Doot Dopoir	
03.	Opposite Drive End Bearing Shaft Fit		
	0 Degrees	60 Degrees	120 Degrees
84.	Shaft Air Seal Fits Post Repair		
	Drive End Air Seal	Opposite Drive End Air Seal	
85.	Shaft Repair Sign-off		
Mecha	anical Fits- Bearing Housings - P	ost Repair	
86.	Drive End - Endbell Bearing Fit Post F	Repair	
	0 Degrees	60 Degrees	120 Degrees

87	Opposite Drive End - Endbell Bearing	Fit Post Repair			
07.	0 Degrees	60 Degrees	120 Degrees		
	0 Degrees	oo Degrees	120 Degrees		
88.	Bearing Cap Condition Post Repair				
	Drive End Bearing Cap	Opposite Drive End Bearing Cap			
	0				
89.	End Bell Air Seal Fits Post Repair				
	Drive End Air Seal	Opposite Drive End Air Seal			
	End Bell Repair Sign-off				
Assen					
	QC Check All Parts for Cleanliness Pr	,			
	Photograph All Major Components pri	or to assembly			
	Final Insulation Resistance Test				
	Assembled Shaft Endplay				
	Assembled Shaft Runout				
96.	Test Run Voltage	N / 1/	N 16		
	Volts	Volts	Volts		
97.	Test Run Amperage				
	Amps	Amps	Amps		
98.	Drive End Vibration Readings - Inches	s Per Second			
	Horizontal	Vertical	Axial		
99.	Opposite Drive End Vibration Reading	js - Inches Per Second			
	Horizontal	Vertical	Axial		
100.	Ambient Temperature - Fahrenheit				
	Drive End Bearing Temps - Fahrenhe	it			
	5 Minutes	10 Minutes	15 Minutes		
102.	Opposite Drive End Bearing Temps -	Fahrenheit			
	5 Minutes	10 Minutes	15 Minutes		
	Document Final Condition with Picture	es atter paint			
104.	Final Pics and QC Review				



STANDARD TERMS AND CONDITIONS FOR PURCHASE OF GOOD AND/OR SERVICES

- 1. <u>APPLICABILITY.</u> The sale of any and all goods and/or services by Mock, Inc. d/b/a Hi-Speed Industrial Service ("Hi-Speed") shall be specifically conditioned upon and subject to the following terms and conditions which are incorporated by reference into any contracts and purchase orders with Hi-Speed, and which shall form and become a part of any agreement related thereto. Buyer's acceptance of any offer or quotation made by Hi-Speed for sale of any goods or services is expressly made subject to the terms and conditions set forth herein and to be so effective, Buyer need not sign or approve these Terms and Conditions to be bound hereunder provided a copy of same is provided to Buyer through any means. None of the terms and conditions contained herein may be added to, expanded, changed, modified, superseded or otherwise altered except as revised in writing and duly executed by Hi-Speed, and all orders received by Hi-Speed shall be governed only by the terms and conditions contained herein, notwithstanding any terms, conditions or provisions of any purchase order, release order, authorization or any other form issued by the Buyer. Hi-Speed hereby objects to any additional, modified, changed, deleted, altered or other terms and conditions not contained herein and notifies Buyer that any such terms or provisions are expressly rejected by Hi-Speed.
- 2. PRICE. All quoted prices shall remain firm and binding for a period of thirty (30) days from the date of quotation or for the period specifically stated in the quotation. The price for any and all goods and/or services ordered or approved by Buyer after thirty (30) days from the date of any quotation are subject to any increase in price that may occur after the expiration of thirty (30) days from the issuance of the quotation and the date the Buyer releases any shipment.
- 3. <u>SCOPE OF GOODS AND/OR SERVICES.</u> The goods and/or services provided by Hi-Speed pursuant to any quotation shall be limited exclusively to those goods and/or services expressly identified therein. Hi-Speed does not assume any responsibility and/or liability for the failure to provide any other goods and/or services not identified in any quotation. Modifications, additions or deletions to or from the scope referenced in any quotation shall only be effective if evidenced in writing and signed by Hi-Speed. The sale of any of all goods and/or services affected by such modification, addition or deletion shall be subject to these same Standard Terms and Conditions whether or not referenced therein.
- 4. <u>BILLING AND PAYMENT TERMS.</u> Hi-Speed shall invoice Buyer for all goods and/or services as same are rendered at the address listed on the quotation. Payments for all goods and/or services shall be due thirty (30) days from the date of the current invoice or as otherwise set forth in the quotation. Late payments are subject to a late fee of 5% of the total invoice amount. Recurring late payments may lead to a deposit requirement on future services or sale of goods. Buyer shall be liable to Hi-Speed for any and all fees and expenses incurred by Hi-Speed to collect any invoices or to enforce these Standard Terms and Conditions, including but not limited to, attorney's fees.
- 5. DELIVERY OF GOODS AND/OR SERVICES. Unless otherwise identified in the quotation, all shipments are F.O.B. Hi-Speed's warehouse and the title to and all risk of loss with respect to any goods shipped shall pass to Buyer when such goods are delivered to the carrier at Hi-Speed's warehouse. Hi-Speed will use its best efforts to affect delivery by the date or dates specified in the quotation. However, Hi-Speed shall not be liable for delay in or failure to make shipment, or to perform services, by any identified date for any reason whatsoever, including but not limited to, causes beyond its reasonable control, such as strikes, fires, floods, epidemics, quarantines, restrictions, severe weather, embargos, acts of God, or public enemy, war, riot, delays in transportation or the inability to obtain necessary labor, materials or manufacturing facilities.
- 6. DELIVERY SITE AND TIME FOR PERFORMANCE. Hi-Speed and Buver agree that time is of the essence for the purchase order and that Buyer shall fully cooperate with Hi-Speed in order to allow Hi-Speed full access to prosecute its work diligently and in an orderly manner. Buyer shall assist Hi-Speed in every way possible to avoid delaying, disrupting or interfering with the progress of Hi-Speed's work at the project site. In the event Hi-Speed's work is delayed, hindered, suspended, disrupted, re-sequenced or interfered with or rendered less efficient or more costly or adversely affected in any way as a result of acts or omissions of Buyer or other contractors or employees of Buyer or by any other reason beyond Hi-Speed's control and without the fault of Hi-Speed, then, in such event, Buyer shall be liable to Hi-Speed for any damages, additional costs, expenses, labor, materials, man hours, acceleration costs, overtime, additional jobsite overhead, extended home office overhead, and any and all other direct and indirect expenses of whatsoever nature or kind, caused in whole or in part, as a result of any of the above-referenced occurrences. Hi-Speed's project records will be the basis for computing the additional costs and damages of Hi-Speed's labor, materials, expenses and overhead related to such changes. BUYER WARRANTS THAT THE SITE FOR DELIVERY OR INSTALLATION OF ANY GOODS AND/OR FOR THE PERFORMANCE OF ANY SERVICES SHALL BE READY AND ADEQUATE FOR HI-SPEED'S DELIVERY OF GOODS AND/OR PERFORMANCE OF SERVICES AND THAT HI-SPEED SHALL HAVE FULL ACCESS THERETO, FREE OF ALL OBSTRUCTIONS. BUYER SHALL ASSUME ALL EXTRA COSTS ASSOCIATED WITH HI-SPEED'S INABILITY TO INSTALL ANY GOODS OR PERFORM ANY SERVICES AS A RESULT OF BUYER'S FAILURE TO COMPLY WITH THIS PROVISION. HI-SPEED MAY NOT INSPECT THE SITE PRIOR TO DELIVERY AND/OR INSTALLATION OF GOODS AND/OR PERFORMANCE OF SERVICES AND MAKES NO WARRANTY AS TO THE SUFFICIENCY OF THE SITE FOR THE DELIVERY AND/OR INSTALLATION OF GOODS AND/OR THE PERFORMANCE OF SERVICES AT SUCH SITE.
- 7. INSPECTION/ACCEPTANCE. All goods and services ordered pursuant to any quotation shall be subject to inspection by Buyer after delivery or performance to determine conformity with the quotation and/or purchase order and Hi-Speed's advertised or published specifications. Buyer shall have a period of thirty (30) days from shipment of goods at the delivery destination specified in the quotation within which to inspect the goods for conformity with the quotation, order and/or Hi-Speed's advertised and published specifications and to provide Hi-Speed with written notice of any discrepancy or rejection. Buyer shall have a period of thirty (30) days following completion of any services within which to inspect the services for conformity with the quotation, purchase order and/or Hi-Speed's advertised and published specifications and to provide Hi-Speed with written notice of any discrepancy or rejection. If the goods delivered or services performed do not so conform, upon delivery of notice to Hi-Speed of any discrepancy, nonconformance or rejection, Hi-Speed shall have the right to reject such goods or services. After the cure period, goods that have been delivered and rejected, in whole or in part, shall be returned to Hi-Speed shall, at its sole cost, re-perform the non-conforming services. Inspection or failure to inspect on any occasion shall not affect Buyer's rights under the warranty provisions herein.
- 8. WARRANTIES. Hi-Speed warrants that all goods shall conform in all material aspects to the goods identified in the quotation to Buyer and/or purchase order, and Hi-Speed makes to Buyer the manufacturer's express warranty for any goods sold to Buyer, which is offered by the manufacturer at the time of acceptance of any quotation by Buyer. This warranty is conditioned upon the installation, operation, and maintenance of the goods in accordance with the manufacturer's recommendations and/or standard industry practice and the goods at all times being operated or used under normal operating conditions for which they were designed. Hi-Speed, at its sole option, will repair or

TermsAndConditions

replace any defective or non-conforming goods in accordance with the applicable manufacturer's warranty. Warranty for any defective or incorrect parts is limited to the repair or replacement of those parts. Hi-Speed warrants that all services will conform in all material respects to the description of services identified in the quotation and will be performed in a good and workmanlike manner in accordance with industry practices and standards. Should the services be reasonably rejected or not conform with the foregoing warranties, Hi-Speed shall, at its sole cost, re-perform the defective or nonconforming services. Notwithstanding the foregoing, these warranties do not extend to goods or services to the extent that such goods have been subject to misuse, neglect or abuse not caused by Hi-Speed or have been used in violation of the approved written instructions furnished to Buyer. THE FOREGOING REPRESENTS THE SOLE AND EXCLUSIVE WARRANTY GIVEN BY HI-SPEED WITH RESPECT TO ALL GOODS SOLD AND IS IN LIEU OF ALL OTHER WARRANTIES EITHER EXPRESS OR IMPLIED. HI-SPEED EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICLAR USE OR PURPOSE. BUYER WAIVES ANY CLAIM THAT THESE EXCLUSIONS OR LIMITATIONS DEPRIVE IT OF AN ADEQUATE REMEDY AT EQUITY OR LAW OR CAUSE THIS AGREEMENT TO FAIL IN ITS ESSENTIAL PURPOSE. BUYER SHALL BE ENTITLED TO NO OTHER REMEDY OTHER THAN AS SET FORTH HEREIN, REGARDLESS OF THE CLAIM OR CAUSE OF ACTION, WHETHER BASED IN CONTRACT, TORT, NEGLIGENCE, GOODS LIABILITY, STRICT LIABILITY OR OTHERWISE.

- 9. LIMITATION OF DAMAGES. HI-SPEED SHALL HAVE NO LIABILITY TO BUYER WITH RESPECT TO THE SALE OR DELIVERY OF ANY GOODS OR THE REPAIR THEREOF OR WITH RESPECT TO THE SALE OR PERFORMANCE OF ANY SERVICES, FOR LOST PROFITS, SPECIAL, CONSEQUENTIAL, EXEMPLARY, PUNITIVE OR INCIDENTAL DAMAGES OF ANY KIND OR NATURE WHETHER ARISING IN CONTRACT, TORT, GOODS LIABILITY OR OTHERWISE, EVEN IF HI-SPEED WAS ADVISED OF THE POSSIBILITY OF SUCH LOSS OR DAMAGES. HI-SPEED SHALL NOT BE LIABLE FOR ANY DAMAGES OR DELAYS CAUSED BY ANY FAILURE TO MAKE ANY DELIVERY OF GOODS BY ANY EXPECTED TIME OR DATE OR THE FAILURE TO PROVIDE OR COMPLETE ANY SERVICES BY ANY EXPECTED DATE OR TIME. IN NO EVENT SHALL HI-SPEED BE LIABLE TO BUYER FOR ANY DAMAGES WHATSOEVER IN EXCESS OF THE TOTAL PRICE PAID FOR ALL GOODS AND/OR SERVICES HEREUNDER OR REFERENCED IN ANY QUOTATION OR THE PURCHASE ORDER.
- 10. <u>SEVERABILITY</u>. The partial or complete invalidity of any provision of these Standard Terms and Conditions shall not affect the enforceability of the remainder of these Standard Terms and Conditions. If any provision is found to be invalid or unenforceable, that portion shall be modified to make it enforceable or shall be stricken and the remainder of these Standard Terms and Conditions shall enforced.
- 11. <u>GOVERNING LAW AND JURISDICTION.</u> Any controversy arising out of any quotation, the purchase order, the goods sold or delivered, repair or replacement thereof, or any services provided pursuant to any quotation or any purchase order, or these Standard Terms and Conditions shall be governed by the laws of the state of Tennessee without regard to any choice of law provisions and any cause of action related in any manner thereto shall be brought only in the state or federal courts of Shelby County, Tennessee.
- 12. <u>ABANDONED EQUIPMENT.</u> Hi-Speed requires that Buyer promptly pick up or provide shipment instructions for Buyer equipment or other Buyer property in Hi-Speed's possession. If equipment or other Buyer property is left with Hi-Speed and not picked up within six (6) months after Hi-Speed's final action related to the applicable property (e.g. evaluation, teardown, estimate, completion of services), Hi-Speed will consider such property abandoned and may dispose of it in accordance with applicable law. Buyer agrees to hold Hi-Speed harmless for any damage or claim for such abandoned property and acknowledges that Hi-Speed may discard or recycle it at Hi-Speed's sole and absolute discretion. Specifically, Hi-Speed may sell Buyer's abandoned property at a private or public sale and retain the proceeds to offset Hi-Speed's storage, inspection and servicing costs. For the avoidance of doubt, Hi-Speed reserves its statutory and other lawful liens for unpaid charges related to abandoned property.
- 13. FORCE MAJEURE. Neither party shall be responsible for any delay or failure in performance of any party of the quotation, purchase order or these Standard Terms and Conditions to the extent that such delays or failures are caused by fire, flood, earth quake, explosion, war, embargo, government requirement, civil or military authority, acts of God, or any other circumstances beyond its reasonable control and not involving any fault or negligence on the party affected ("Condition"). If any such Condition occurs, the party delayed or unable to perform shall promptly give written notice to the other party and, if such Condition remains at the end of thirty (30) days, the party affected by the other party's delay and inability to perform may elect to (i) terminate such order or part thereof, or (ii) suspend the order for the duration of the Condition, if the Buyer is the suspending party, buy elsewhere comparable material to be sold under the order and apply to any commitment the purchase price of such purchase, and resume performance of the order once the Condition ceases, with an option in the affected party to extend the period of this order up to the length of the time the Condition endures.
- 14. <u>NONWAIVER</u>. No course of dealing or failure of either party to strictly enforce any term, right, or condition of these Standard Terms and Conditions will be construed as a waiver of such term, right or condition. Any waiver by Hi-Speed will only be in writing and will waive no succeeding breach of a term, right or condition.
- 15. <u>ASSIGNMENT.</u> The rights and obligations of the parties shall neither be assigned nor delegated without the prior written consent of the other party. However, any party may assign or delegate its respective rights and obligations, in whole or in part, (i) to any subsidiary, (ii) pursuant to other financing, merger or reorganization or (iii) pursuant to any sale or transfer of substantially all of the assets of the assigning party. These Standard Terms and Conditions shall bind the heirs, successors and assigns of the parties hereto.
- 16. <u>NO INDIVIDUAL LIABILITY</u>. Notwithstanding any other agreement to the contrary, the Buyer agrees that in no event will the Buyer hold and HI-Speed owner, director, officer or employee personally liable for unintentional tortious conduct or conduct that constitutes the breach of any contract between HI-Speed and the Buyer, even if the HI-Speed owner, director, officer or employee is or could be construed to be a party to such contract.